

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS 75207

RESERVOIR FLUID DIVISION

Good Oil Company
P. O. Box 100
Oil City, Texas 10010

Attention: Mr. John L. Jones

Subject: Reservoir Fluid Study
Oil Well No. 4
Productive Field
Samson County, Texas

Gentlemen:

Two subsurface fluid samples were collected from the subject well and forwarded to our Dallas laboratory for a reservoir fluid study. Room temperature bubble points of these samples were measured and found to be 1118 psig and 1110 psig for Sample No. 1 and Sample No. 2, respectively. Subsurface Sample No. 1 was selected for the study. The results of this study are reported herein.

The bubble point pressure was found to be 1270 psig at the reservoir temperature of 114°F. During differential pressure depletion at 114°F., the reservoir fluid evolved 425 standard cubic feet of vapor per barrel of residual oil. The associated formation volume factor was found to be 1.221 barrels of fluid per barrel of residual liquid.

The viscosity of the fluid was measured from above reservoir pressure to atmospheric pressure. This viscosity was found to vary from a minimum of 0.624 centipoise at bubble point pressure to a maximum of 1.241 centipoises at atmospheric pressure. The gravity of this residual oil was found to be 44.0° API at 60°F.

Separator tests were made at 130°F. and at pressures ranging from 30 to 200 psig. These separator tests indicate an optimum separator

Good Oil Company
Oil Well No. 4

Page Two

pressure of 100 to 125 psig result in near maximum recovery and maximum stock tank oil gravity. The vapors from the separator tests were collected and analyzed by chromatographic techniques. The results of these analyses are reported on pages seven through ten.

The reservoir fluid was analyzed by low temperature fractional distillation. The results are presented on page eleven of this report.

It has been a pleasure to perform this study for you. Should you have any questions regarding these data or if we may be of further assistance, please feel free to contact us.

Very truly yours,

Core Laboratories, Inc.
Reservoir Fluid Analysis

Manager

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 1 of 14

File _____

Company Good Oil Company Date Sampled December 1 1975

Well Oil Well No. 4 County Samson

Field Productive State Texas

FORMATION CHARACTERISTICS

Formation Name	<u>Cretaceous</u>
Date First Well Completed	<u>December 18</u> , 19 <u>72</u>
Original Reservoir Pressure	<u>3015</u> PSIG @ <u>5994</u> Ft. KB
Original Produced Gas-Oil Ratio	<u>450</u> SCF/Bbl
Production Rate	<u>300</u> Bbl/Day
Separator Pressure and Temperature	<u>60</u> PSIG, <u>130</u> °F.
Oil Gravity at 60° F.	<u>43.2</u> °API
Datum	<u>5350</u> Ft. Subsea
Original Gas Cap	<u>No</u>

WELL CHARACTERISTICS

Elevation	<u>640</u> Ft. KB
Total Depth	<u>6200</u> Ft. KB
Producing Interval	<u>5989-5999</u> Ft. KB
Tubing Size and Depth	<u>2-7/8 O. D. In. to 5980</u> Ft. KB
Productivity Index	<u>1.5</u> Bbl/D/PSI @ <u>300</u> Bbl/Day
Last Reservoir Pressure	<u>2990</u> PSIG @ <u>5994</u> Ft. KB
Date	<u>December 1</u> , 19 <u>75</u>
Reservoir Temperature	<u>114</u> °F. @ <u>5994</u> Ft. KB
Status of Well	<u>Shut in 72 hours</u>
Pressure Gauge	<u>Amerada</u>
Normal Production Rate	<u>300</u> Bbl/Day
Gas-Oil Ratio	<u>450</u> SCF/Bbl
Separator Pressure and Temperature	<u>60</u> PSIG, <u>130</u> °F.
Base Pressure	<u>14.65</u> PSIA
Well Making Water	<u>None</u> % Cut

SAMPLING CONDITIONS

Sampled at	<u>4950</u> Ft. KB
Status of Well	<u>Shut in 72 hours.</u>
Gas-Oil Ratio	_____ SCF/Bbl
Separator Pressure and Temperature	_____ PSIG, _____ °F.
Tubing Pressure	<u>1210</u> PSIG
Casing Pressure	<u>Packer</u> PSIG
Core Laboratories Engineer	<u>PLM</u>
Type Sampler	<u>Wofford</u>

REMARKS:

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 2 of 14

File _____

Well Oil Well No. 4

VOLUMETRIC DATA OF Reservoir Fluid SAMPLE

1. Saturation pressure (bubble-point pressure) 1270 PSIG @ 114 °F.

2. Thermal expansion of saturated oil @ 5000 PSI = $\frac{V @ 114 \text{ } ^\circ\text{F}}{V @ 74 \text{ } ^\circ\text{F}}$ = 1.02067

3. Compressibility of saturated oil @ reservoir temperature: Vol/Vol/PSI:

From 5000 PSI to 4000 PSI = 7.27×10^{-6}

From 4000 PSI to 2000 PSI = 8.30×10^{-6}

From 2000 PSI to 1270 PSI = 9.68×10^{-6}

4. Specific volume at saturation pressure: ft³/lb 0.02211 @ 114 °F.

CORE LABORATORIES, INC.
 Petroleum Reservoir Engineering
 DALLAS, TEXAS 75207

Page 3 of 14

File _____

Well Oil Well No. 4

Reservoir Fluid SAMPLE TABULAR DATA

PRESSURE PSI GAUGE	PRESSURE-VOLUME RELATION @ 114 °F. RELATIVE VOLUME OF OIL AND GAS, V/V _{BAT.}	VISCOSITY OF OIL @ 114 °F. CENTIPOISES	DIFFERENTIAL LIBERATION @ 114 °F.		
			GAS/OIL RATIO LIBERATED PER BARREL OF RESIDUAL OIL	GAS/OIL RATIO IN SOLUTION PER BARREL OF RESIDUAL OIL	RELATIVE OIL VOLUME, V/V _R
5000	0.9694	0.851			1.183
4500	0.9727				1.187
4000	0.9765	0.792			1.192
3500	0.9803	0.761			1.197
3000	0.9843	0.730			1.201
2500	0.9885	0.702			1.207
2000	0.9929	0.669			1.212
1700	0.9958				1.215
1600	0.9967				1.217
1500	0.9976	0.638			1.218
1400	0.9986				1.219
1300	0.9997				1.220
1270	1.0000	0.624	0	425	1.221
1263	1.0023				
1257	1.0044				
1251	1.0064				
1226	1.0156				
1177	1.0365				
1112	1.0680				
1100		0.666	46	379	1.201
1037	1.1098				
950		0.709	87	338	1.185
943	1.1729				
844	1.2569				
800		0.759	129	296	1.167
738	1.3832				
650		0.816	170	255	1.151
622	1.5725				
500		0.883	211	214	1.136
498	1.8767				
400	2.2756				
350		0.959	254	171	1.118
304	2.9085				

V = Volume at given pressure

V_{BAT.} = Volume at saturation pressure and the specified temperature.

V_R = Residual oil volume at 14.65 PSI absolute and 60° F.

CORE LABORATORIES, INC.
 Petroleum Reservoir Engineering
 DALLAS, TEXAS 75207

Page 4 of 14

File _____

Well Oil Well No. 4

Reservoir Fluid SAMPLE TABULAR DATA

PRESSURE PSI GAUGE	PRESSURE-VOLUME RELATION @ 114 °F.. RELATIVE VOLUME OF OIL AND GAS, V/V _{SAT} .	VISCOSITY OF OIL @ 114 °F.. CENTIPOISES	DIFFERENTIAL LIBERATION @ 114 °F.		
			GAS/OIL RATIO LIBERATED PER BARREL OF RESIDUAL OIL	GAS/OIL RATIO IN SOLUTION PER BARREL OF RESIDUAL OIL	RELATIVE OIL VOLUME, V/V _R
222	3.9336				
200			298	127	1.100
108			333	92	1.084
60			352	73	1.074
0		1.241	425	0	1.028
				@ 60°F. =	1.000

Gravity of residual oil = 44.0° API @ 60°F.

V = Volume at given pressure

V_{SAT} = Volume at saturation pressure and the specified temperature.

V_R = Residual oil volume at 14.65 PSI absolute and 60° F.

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 5 of 14

File _____

Well Oil Well No. 4

Differential Pressure Depletion at 114° F.

<u>Pressure PSIG</u>	<u>Oil Density Gms/Cc</u>	<u>Gas Gravity</u>	<u>Deviation Factor Z</u>
1270	0.7245		
1100	0.7311	0.652	0.893
950	0.7357	0.658	0.903
800	0.7419	0.663	0.915
650	0.7469	0.673	0.931
500	0.7517	0.691	0.943
350	0.7576	0.721	0.960
200	0.7634	0.785	0.974
108	0.7679	0.908	0.988
60	0.7715	1.031	
0	0.7838	1.447	

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 6 of 14

File _____

Well Oil Well No. 4

SEPARATOR TESTS OF Reservoir Fluid SAMPLE

SEPARATOR PRESSURE, PSI GAUGE	SEPARATOR TEMPERATURE, ° F.	SEPARATOR GAS/OIL RATIO See Foot Note (1)	STOCK TANK GAS/OIL RATIO See Foot Note (1)	STOCK TANK GRAVITY, ° API @ 60° F.	SHRINKAGE FACTOR, V_R/V_{SAT} . See Foot Note (2)	FORMATION VOLUME FACTOR, V_{SAT}/V_R See Foot Note (3)	SPECIFIC GRAVITY OF FLASHED GAS
30	130	473	25	43.1	0.7877	1.270	0.952
60	130	447	36	43.4	0.7963	1.256	0.918
100	130	415	56	43.5	0.8043	1.243	0.876
200	130	349	126	43.3	0.7954	1.257	0.759

- (1) Separator and Stock Tank Gas/Oil Ratio in cubic feet of gas @ 60° F. and 14.65 PSI absolute per barrel of stock tank oil @ 60° F.
- (2) Shrinkage Factor: V_R/V_{SAT} is barrels of stock tank oil @ 60° F. per barrel of saturated oil @ 1270 PSI gauge and 114 ° F.
- (3) Formation Volume Factor: V_{SAT}/V_R is barrels of saturated oil @ 1270 PSI gauge and 114 ° F. per barrel of stock tank oil @ 60° F.

These analyses, opinions or interpretations are based on observations and material supplied by the client to whom, and for whose exclusive and confidential use, this report is made. The interpretations or opinions expressed represent the best judgment of Core Laboratories, Inc. (all errors and omissions excepted); but Core Laboratories, Inc. and its officers and employees, assume no responsibility and make no warranty or representations as to the productivity, proper operation, or profitability of any oil, gas or other mineral well or sand in connection with which such report is used or relied upon.

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
 DALLAS, TEXAS

Page 7 of 14

File _____

Company Good Oil Company Formation Cretaceous
 Well Oil Well No. 4 County Samson
 Field Productive State Texas

HYDROCARBON ANALYSIS OF Primary Separator GAS SAMPLE

COMPONENT	MOL PER CENT	G P M
Carbon Dioxide	1.54	
Nitrogen	0.14	
Methane	61.48	
Ethane	15.16	3.807
Propane	10.76	2.944
iso-Butane	2.43	0.790
n-Butane	3.69	1.157
iso-Pentane	1.21	0.440
n-Pentane	0.94	0.339
Hexanes...	0.86	0.349
Heptanes plus	1.79	0.808
	100.00	10.634

Calculated gas gravity (air = 1.000) = 0.952

Calculated gross heating value = 1582 BTU
 per cubic foot of dry gas at 14.65 psia at 60° F.

Collected at 30 psig and 130 ° F. in the laboratory.

These analyses, opinions or interpretations are based on observations and material supplied by the client to whom, and for whose exclusive and confidential use, this report is made. The interpretations or opinions expressed represent the best judgment of Core Laboratories, Inc. (all errors and omissions excepted); but Core Laboratories, Inc. and its officers and employees, assume no responsibility and make no warranty or representations as to the productivity, proper operation or use of the well or sand in connection with which such report is used or relied upon.

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 8 of 14

File _____

Company Good Oil Company Formation Cretaceous
 Well Oil Well No. 4 County Samson
 Field Productive State Texas

HYDROCARBON ANALYSIS OF Primary Separator GAS SAMPLE

COMPONENT	MOL PER CENT	G P M
Carbon Dioxide	1.59	
Nitrogen	0.16	
Methane	62.65	
Ethane	15.65	3.930
Propane	10.74	2.939
iso-Butane	2.26	0.735
n-Butane	3.31	1.037
iso-Pentane	1.00	0.364
n-Pentane	0.75	0.270
Hexanes	0.61	0.247
Heptanes plus	1.28	0.578
	100.00	10.100

Calculated gas gravity (air = 1.000) = 0.918

Calculated gross heating value = 1528 BTU
 per cubic foot of dry gas at 14.65 psia at 60° F.

Collected at 60 psig and 130 ° F. in the laboratory.

These analyses, opinions or interpretations are based on observations and material supplied by the client to whom, and for whose exclusive and confidential use, this report is made. The interpretations or opinions expressed represent the best judgment of Core Laboratories, Inc. (all errors and omissions excepted); but Core Laboratories, Inc. and its officers and employees, assume no responsibility and make no warranty or representations as to the productivity, proper operation or use of the equipment or process in connection with which such report is used or relied upon.

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 9 of 14

File _____

Company Good Oil Company Formation Cretaceous
 Well Oil Well No. 4 County Samson
 Field Productive State Texas

HYDROCARBON ANALYSIS OF Primary Separator GAS SAMPLE

COMPONENT	MOL PER CENT	G P M
Carbon Dioxide	1.67	
Nitrogen	0.13	
Methane	64.73	
Ethane	16.08	4.038
Propane	10.10	2.763
iso-Butane	1.96	0.637
n-Butane	2.75	0.862
iso-Pentane	0.77	0.280
n-Pentane	0.57	0.205
Hexanes	0.41	0.166
Heptanes plus	0.83	0.375
	100.00	9.326

Calculated gas gravity (air = 1.000) = 0.876

Calculated gross heating value = 1461 BTU
 per cubic foot of dry gas at 14.65 psia at 60° F.

Collected at 100 psig and 130 ° F. in the laboratory.

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
 DALLAS, TEXAS

Page 10 of 14

File _____

Company Good Oil Company Formation Cretaceous
 Well Oil Well No. 4 County Samson
 Field Productive State Texas

HYDROCARBON ANALYSIS OF Primary Separator GAS SAMPLE

COMPONENT	MOL PER CENT	G P M
Carbon Dioxide	1.68	
Nitrogen	0.16	
Methane	74.73	
Ethane	13.52	3.395
Propane	6.37	1.743
iso-Butane	1.05	0.342
n-Butane	1.37	0.429
iso-Pentane	0.37	0.135
n-Pentane	0.27	0.097
Hexanes	0.16	0.065
Heptanes plus	0.32	0.145
	100.00	6.351

Calculated gas gravity (air = 1.000) = 0.759

Calculated gross heating value = 1280 BTU
 per cubic foot of dry gas at 14.65 psia at 60° F.

Collected at 200 psig and 130 ° F. in the laboratory.

CORE LABORATORIES, INC.
Petroleum Reservoir Engineering
DALLAS, TEXAS

Page 11 of 14

File _____

Company Good Oil Company Formation Cretaceous

Well Oil Well No. 4 County Samson

Field Productive State Texas

HYDROCARBON ANALYSIS OF Reservoir Fluid SAMPLE


COMPONENT	MOL PER CENT	WEIGHT PER CENT	DENSITY @ 60° F. GRAMS PER CUBIC CENTIMETER	° API @ 60° F.	MOLECULAR WEIGHT
Carbon Dioxide	0.66	0.28			
Nitrogen	0.12	0.03			
Methane	25.43	3.85			
Ethane	6.47	1.84			
Propane	5.39	2.24			
iso-Butane	1.78	0.98			
n-Butane	2.58	1.41			
iso-Pentane	1.41	0.96			
n-Pentane	1.18	0.81			
Hexanes	3.14	2.54			
Heptanes plus	<u>51.84</u>	<u>85.06</u>	0.8211	40.7	174
	100.00	100.00			

Core Laboratories, Inc.
Reservoir Fluid Analysis

Manager


PRESSURE-VOLUME RELATIONS OF RESERVOIR FLUID

Company	Good Oil Company	Formation	Cretaceous
Well	Oil Well No. 4	County	Samson
Field	Productive	State	Texas

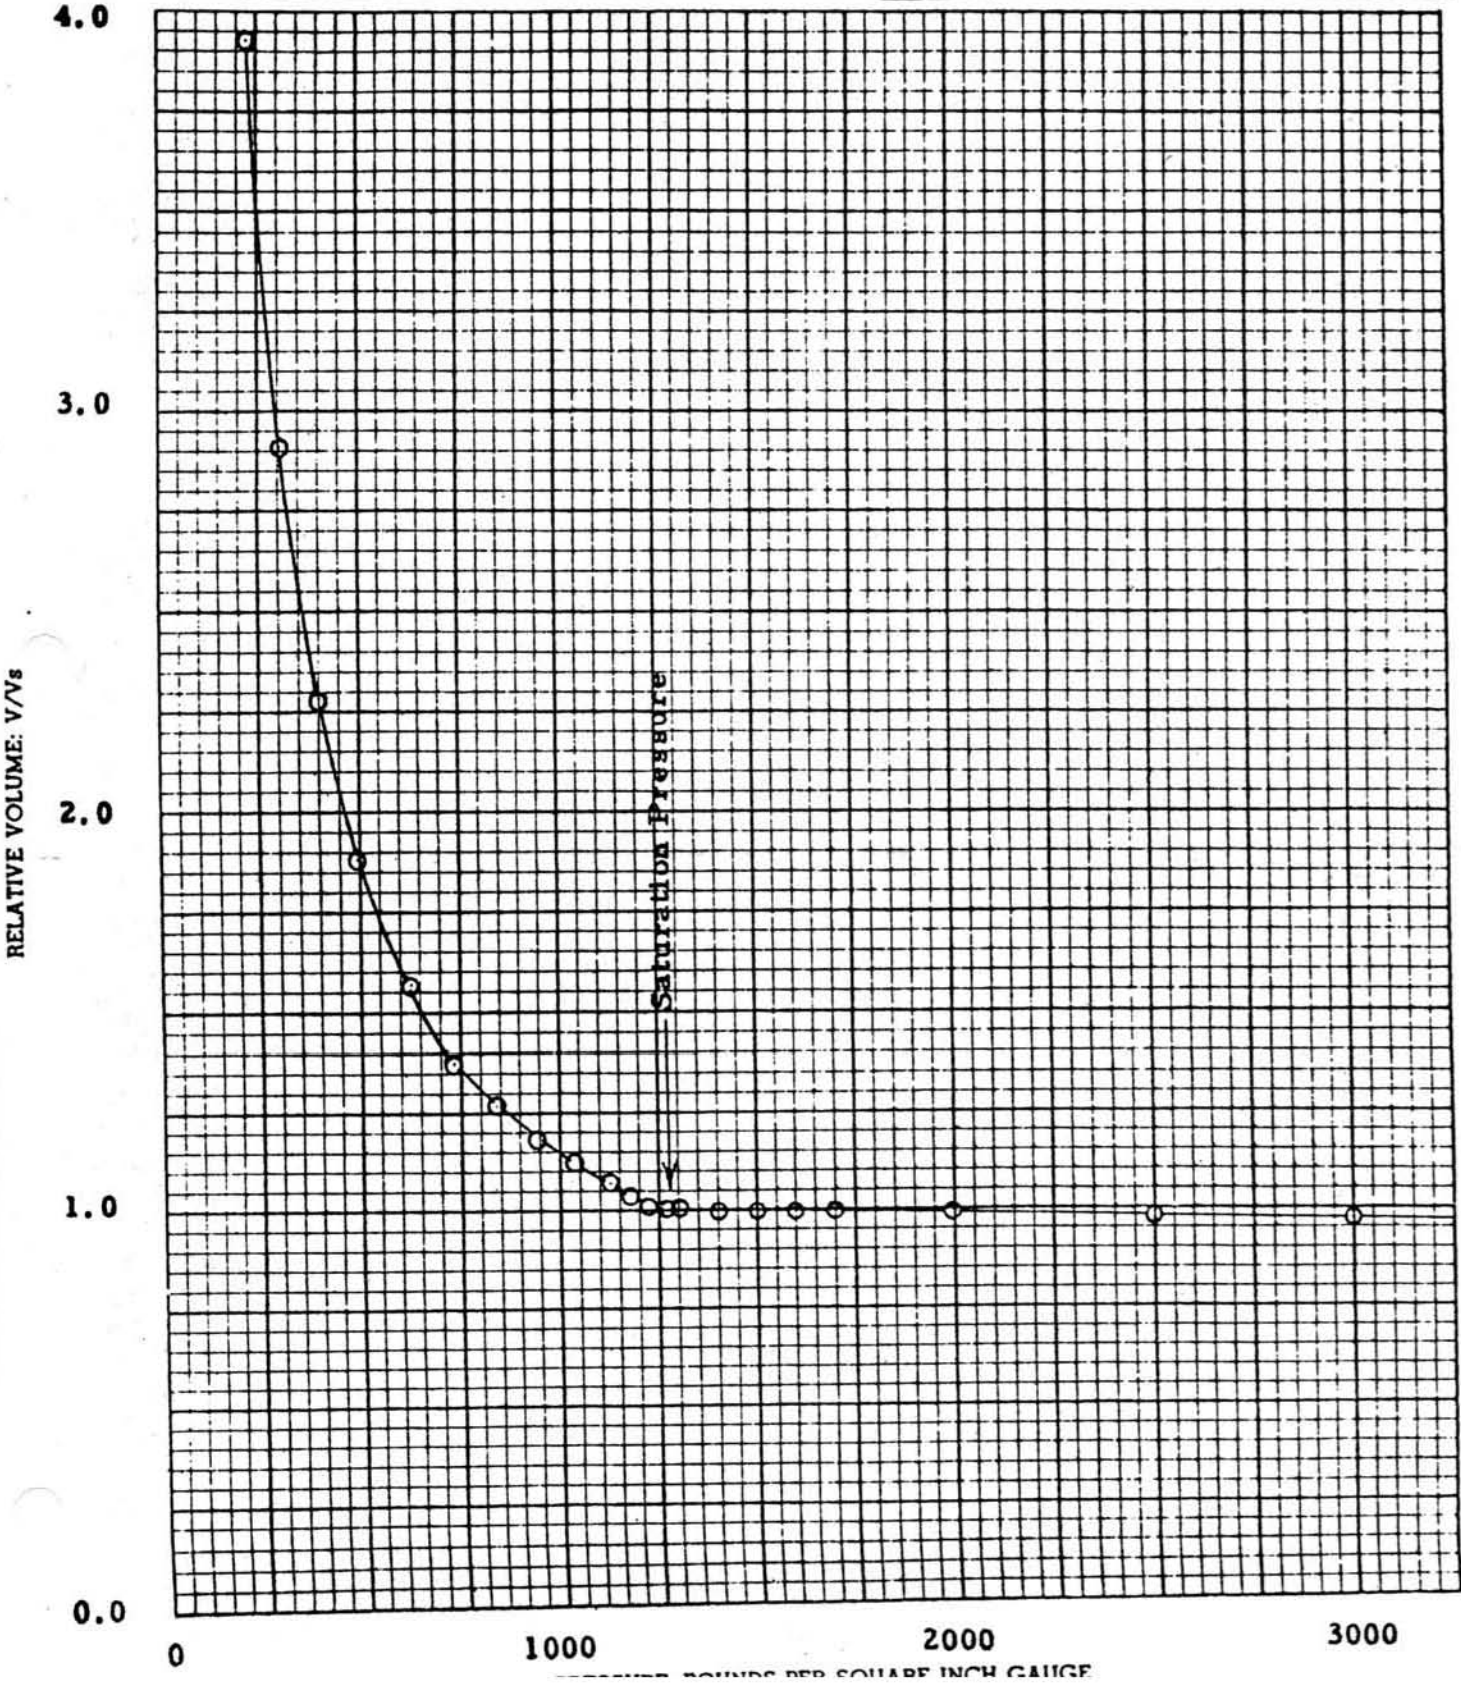

DIFFERENTIAL VAPORIZATION OF RESERVOIR FLUID

Company	<u>Good Oil Company</u>	Formation	<u>Cretaceous</u>
Well	<u>Oil Well No. 4</u>	County	<u>Samsom</u>
Field	<u>Productive</u>	State	<u>Texas</u>

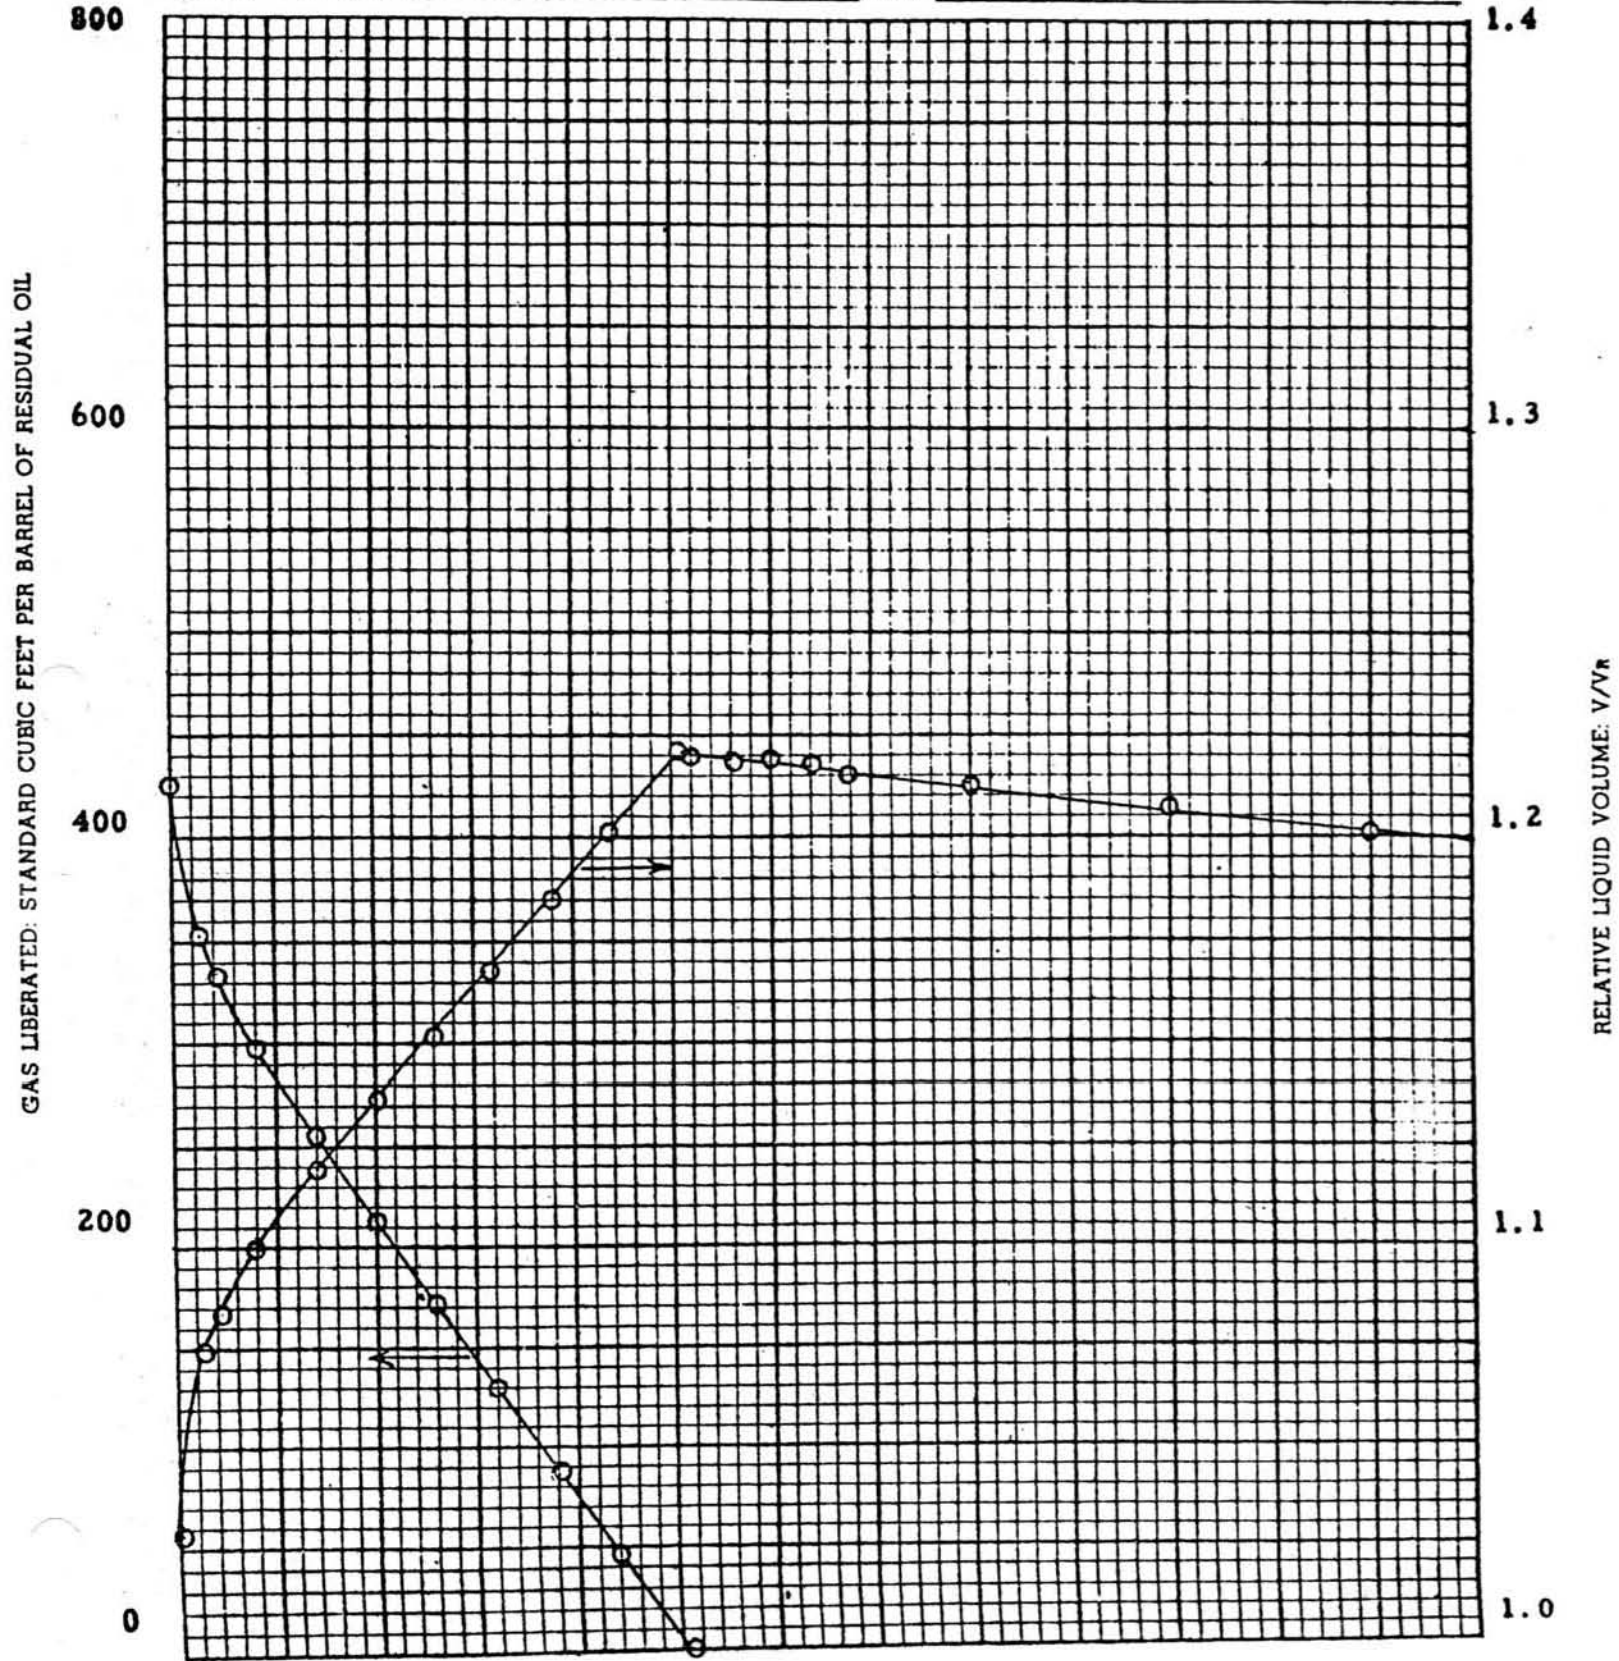

VISCOSITY OF RESERVOIR FLUID

Company Good Oil Company Formation Cretaceous
 Well Oil Well No. 4 County Samson
 Field Productive State Texas

