

Well Control and Management Considerations in EOR projects

① Well Controls: Practical & Reservoir Simulation

(a) Target Rate (volumetric)

- Surface Product Rates

$$\overbrace{q_g \quad q_o \quad q_w \quad q_L}^{(4)}$$

- Reservoir Phase Rates

$$q_L = q_o + q_w$$

$$\left. \begin{matrix} q_{gR} & q_{oR} & q_{wR} & q_{LR} \\ & & & = \\ & & & q_{oR} + q_{wR} \end{matrix} \right\}$$

⑤

(EOR) $q_{tR} = q_{gR} + q_{oR} + q_{wR}$

(q_g) $q_g = \underbrace{q_{gR} / B_{gd}(P)}_{q_{g(OR)}} + \underbrace{(q_{oR} / B_o^{(P)}) R_S(P)}_{q_{g(OR)}}$

(q_o) $q_o = \underbrace{q_{oR} / B_o}_{q_{o(OR)}} + \underbrace{(q_{gR} / B_{gd}) R_S}_{q_{o(OR)}}$


(b) Wellbore BT Pressure Constraints

(alt. Wellhead Tubing Pressure Constraints)

Producer Well: $P_{wf, min}$ (= atm default)

Injector Well: $P_{inj, max}$

EOR Projects : \approx Target Average Reservoir Pressure \bar{P}_{EOR}


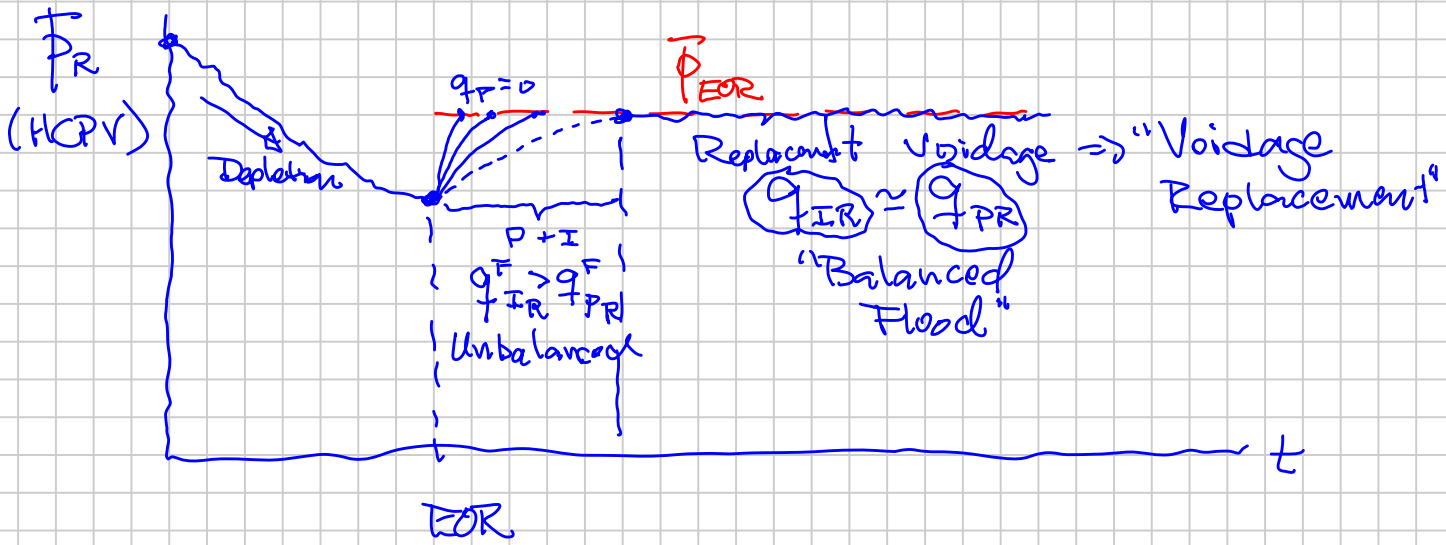


CSD Petroleum Industry Course

Displacement Problem 1

(This problem pertains to the displacement of oil up-structure by an influxing aquifer. The problem is to be solved using the Buckley-Leverett method).

The sketches below illustrate a section of reservoir in which water is advancing up-structure as a result of pressure reduction in the oil band section. To simplify this problem two assumptions will be used: (1) the initial water in the oil zone amounts to 32% saturation and is constant with height. To say it differently, we will neglect any effects of the initial transition zone saturation. (2) water breakthrough into the 1st line well occurs when the front reaches the elevation of the well. In other words, we will neglect effects of "cusping" of water into the well.

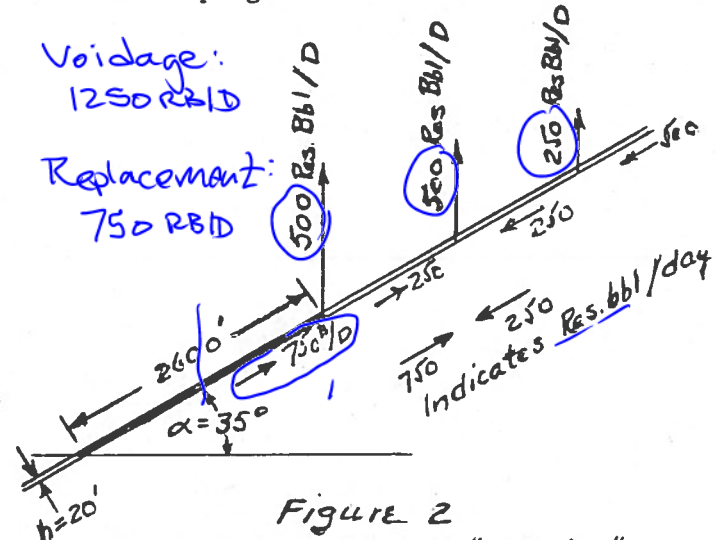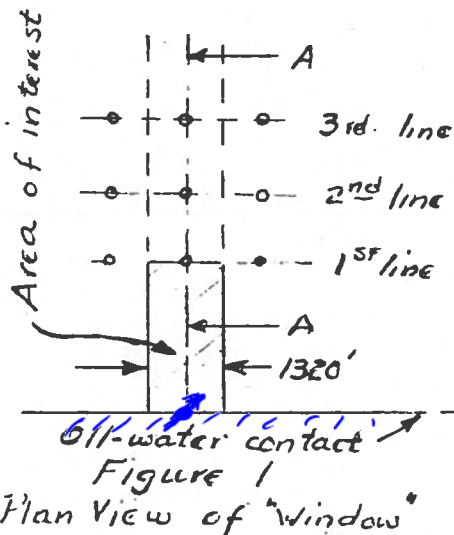

"Window" Data

Window length = 2600'
 Window width = 1320'
 Formation thickness = 20'
 Formation dip = +35°
 Porosity = 0.235
 Permeability (abs) = 100 md
 Up-dip flow rate at oil-water contact = 750 Res.bbl/day

Fluid Saturations

$S_{iw} = 0.30$; $S_{wi} = 0.32$
 $S_{oi} = 0.68$ $S_{gi} = 0.00$

Fluid Properties

$B_o = 1.27$ $B_w = 1.02$
 $\mu_o = 1.16$ cp $\mu_w = 0.38$ cp
 $\rho_o = 45$ lb/ft³ $\rho_w = 65$ lb/ft³

Relative Permeability Data

S_w	$k_{ro:imb}$	$k_{rw}/k_{ro}]_{imb}$
0.30	0.725	0.0000 (S_{iw})
0.32	0.615	0.0195
0.35	0.470	0.072
0.40	0.315	0.280
0.45	0.210	0.790
0.50	0.133	2.000
0.55	0.077	4.750
0.60	0.036	11.85
0.65	0.012	33.50
0.67	0.007	55.53

1980

Displacement Problem 1 Cont.

The oil that is displaced up-structure by the influxing aquifer water will presumably be captured by the oil wells. When the water-oil front reaches the elevation of any well there will be an instantaneous jump in water-oil ratio (this is because we are considering only one layer - the jump would be more gradual if many layers were considered). We are, of course, interested in the amount of oil that can be recovered from the invaded volume (cross-hatched area in Fig 1) as we continue to produce the wells. The items to be calculated are:

(1) How many barrels of stocktank oil will be displaced from the invaded volume (and recovered) when the front first breaks through into the first line well ? What fraction of initial oil in this volume does this amount to ?

(2) What will be the surface producing water-oil ratio immediately after breakthrough ? Assuming that the well continues to produce at the same total fluid rate, what will the stocktank oil rate be ?

(3) When the first line well's cut reaches 95 %,what will be the amount of oil recovered from the invaded volume ? How long (years) will it take to reach this cut ? (Consider that the the aquifer influx rate into the window remains constant at 750 reservoir barrels per day.)

1980

Handwritten signature or initials.

CSD Petroleum Industry Course

Solution Displacement Problem 1

A. Calculation of fractional flow curve.

$$f_w = \frac{1 - \alpha k_{ro}}{1 + \frac{k_{ro} \cdot \mu_w}{k_{rw} \cdot \mu_o}}$$

$$\alpha = \frac{7.84(10^6) k_{abs} (P_w - P_o) \mu_{oil} x}{91A \mu_o}$$

$$x = 35'$$

$$\alpha = \frac{7.84(10^6) \cdot 100 (65 - 45) 0.5736}{750/20 \cdot 1320 \cdot 1.16} = 0.2729$$

$$S_{iw} = 0.30$$

$$S_{wi} = 0.32$$

$$-\mu_w/\mu_o = \frac{0.38}{1.16} = 0.3276$$

$$f_w = \frac{1 - 0.2729 k_{ro}}{1 + \frac{0.3276}{k_{rw}/k_{ro}}}$$

S_{rd}	k_{ro}	k_{rw}/k_{ro}	f_w	$\frac{f_w - f_{wi}}{S_w - S_{wi}}$	$\frac{\Delta f_w}{\Delta S_w}$
0.30 ← S_{iw}	0.725	0.0000	0	—	—
0.32 ← S_{wi}	0.615	0.0195	0.0467 ← f_{wi}	—	—
0.35	0.470	0.072	0.1571	3.680	—
0.40	0.315	0.280	0.4212	4.651	—
0.45	0.210	0.790	0.6664	4.767	4.904
0.50	0.133	2.000	0.8281	4.341	3.234
0.55	0.071	4.750	0.9158	3.779	1.754
0.60	0.036	11.85	0.9635	3.274	0.954
0.65	0.012	33.50	0.9871	2.850	0.472
0.67	0.007	55.53	0.9922	2.701	0.255

From plot of $\frac{f_w - f_{wi}}{S_w - S_{wi}}$ vs S_w The maximum occurs at $S_w = 0.430$. Maximum value is 4.80, which is slope of tangent line.

1. At break through at the first time well, the average saturation behind the front is

$$\bar{S}_{w-BT} = S_{wt} + \frac{1 - f_{wi}}{(f_w - f_{wi}) / (S_w - S_{wi})_{max}} = 0.430 + \frac{(1 - 0.575)}{4.80} = 0.5185$$

0.5185

STB recovered @ BT

$$N_p = \frac{V_p [\bar{S}_w]_{BT} - \bar{S}_{wi}}{P_o} = \frac{(2600 \cdot 1320 \cdot 20) \cdot 0.235 [0.5185 - 0.320]}{1.27 \cdot 5.615}$$

$$N_p = 449.0 (10^3) \text{ STB}$$

$$\text{Rec. Fraction} = \frac{(0.5185 - 0.320)}{(1 - 0.320)} = 0.292$$

2. What will be surface water-oil ratio at B.T.

$$\text{Subsurface } w/o = \frac{q_w}{q_o} = \frac{0.5185}{(1 - 0.5185)} = 1.077 = \text{WOR}$$

$$\text{Surface water-oil ratio} = 1.077 \cdot \frac{P_o}{P_w} = 1.077 \cdot \frac{1.27}{1.02} = 1.34$$

$$q_o = \frac{q_t \cdot f_o}{P_o} = \frac{500 (1 - 0.5185)}{1.27} = 189.6 \text{ STB/D}$$

3. Cut (a) first line well = 95%

$$\text{Cut} = 0.95 = \frac{q_w}{q_w + q_o} \quad \therefore F_{wo} = \frac{q_w}{q_o} = \frac{95}{5} = 19$$

$$\text{WOR (subsurface)} = F_{wo} \cdot \frac{P_w}{P_o} = 19 \cdot \frac{1.02}{1.27} = 15.26 = \frac{q_w P_w}{q_o P_o}$$

$$\therefore f_w = \frac{15.26}{15.26 + 1} = \frac{q_w P_w}{q_w P_w + q_o P_o} = 0.9385; S_{wc} = 0.569$$

$$\therefore \bar{S}_w \Big|_0^c = S_{wc} + \frac{(1 - f_{wc})}{\frac{\partial f_w}{\partial S_w}} = 0.569 + \frac{(1 - 0.9385)}{0.95} = 0.6337$$

$$\begin{aligned} \therefore \text{Recovery @ 95\% cut} &= \frac{(2600 \cdot 1320 \cdot 20) \cdot 0.235 (0.6337 - 0.320)}{5.615 \cdot 1.27} \\ &= 709,588 (10^3) \text{ STB} \end{aligned}$$

$$\text{Pore Voling} = V_{iD} = \frac{1}{\frac{\partial f_w}{\partial S_w}} = \frac{1}{0.95} = 1.053$$

\(\therefore\) Time to reach 95% cut

$$t = \frac{w_i}{q_i} = \frac{(2600 \cdot 1320 \cdot 20) \cdot 0.235 \cdot 1.053}{5.615 \cdot 750 \cdot 365} = 11.05 \text{ years}$$

05/15/20

Pg 3 of 3.


$\bar{S}_w]_{BT} = 0.5185$

$\bar{S}_w]_0^c = 0.63372$

Solution Displacement Problem 1

Figure 1

SQUARE 10 X 10 TO THE INCH AS 8807 60

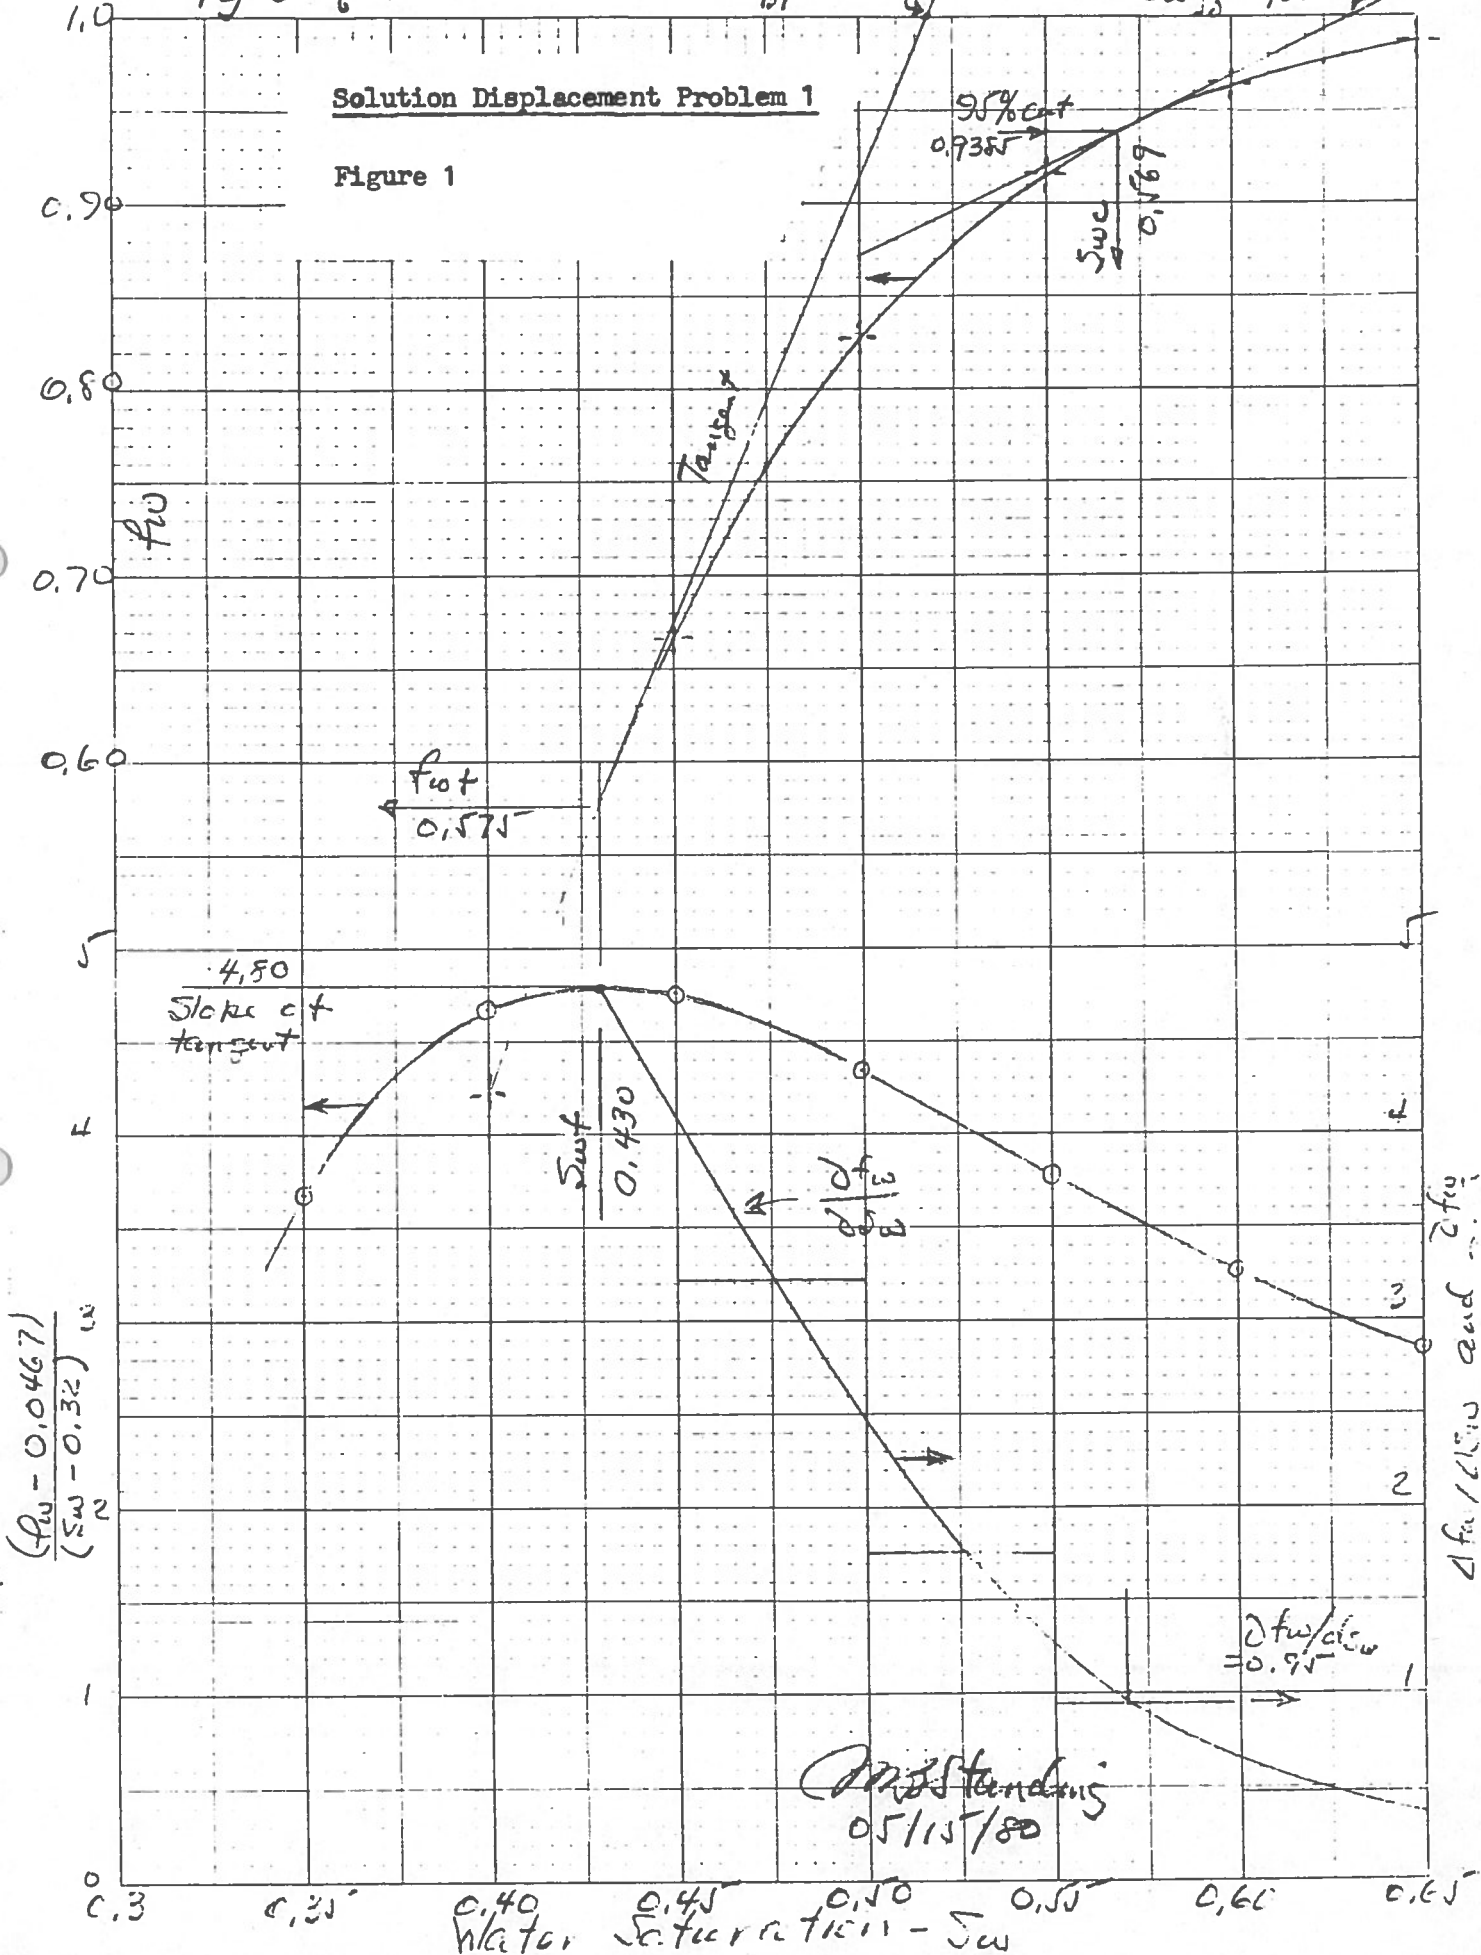

$$\frac{(f_w - 0.0467)}{(S_w - 0.32)}$$

$\Delta f_w / \Delta S_w$ and $\frac{df_w}{dS_w}$