


Notes for Youtube video Flow assurance considerations in Field development

Flow assurance considerations in hydrocarbon field development and planning

Prof. Milan Stanko (NTNU)

1


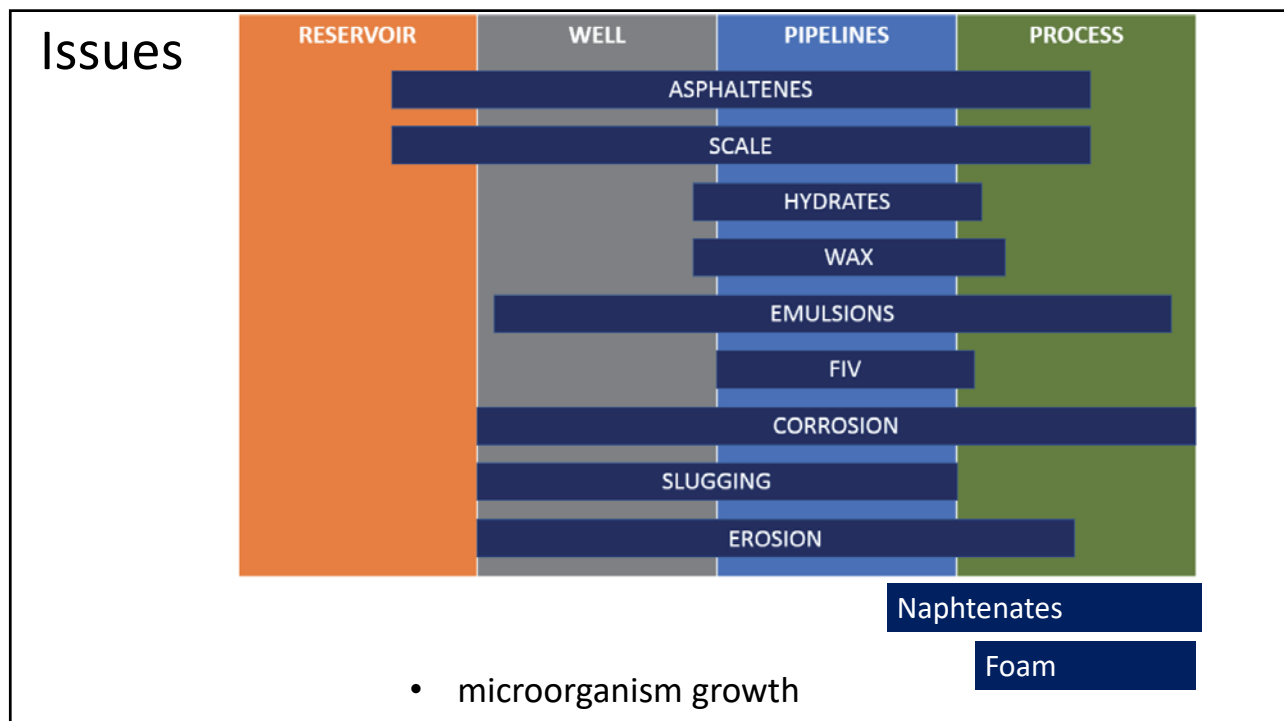


2

Hydrates




<https://www.youtube.com/watch?v=Oz4NLXfdqpA>

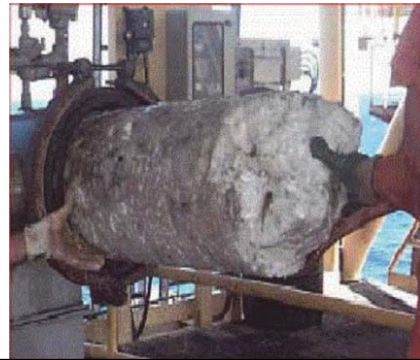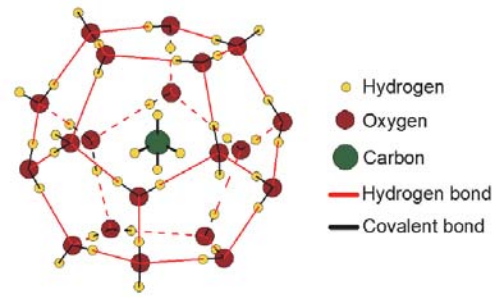

3

Hydrates - conditions



- Free water (in liquid phase)
- Small hydrocarbon molecules
- Particular range of pressure and temperature.

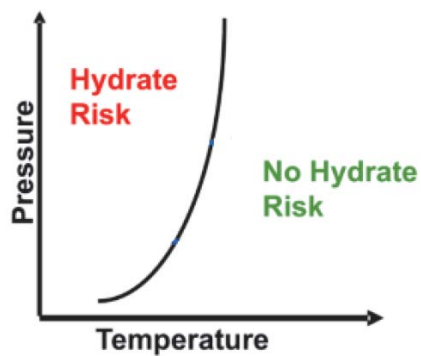

4

Hydrates - conditions

- Free water (in liquid phase)
- Small hydrocarbon molecules
- Particular range of pressure and temperature.

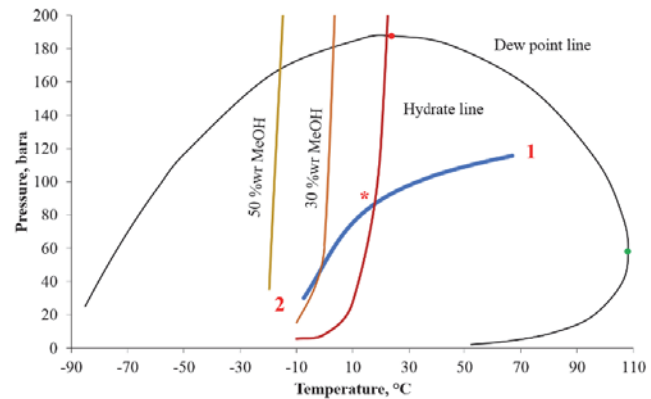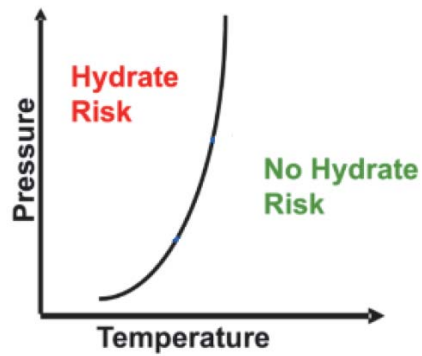


5

Wax




TAKEN FROM EQUINOR

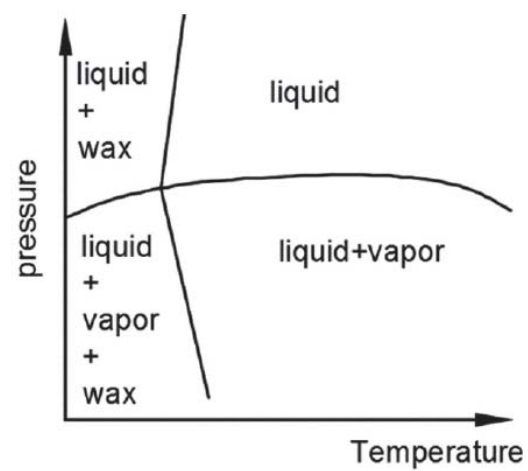

Paraffins (C18 - C36)

6


Wax

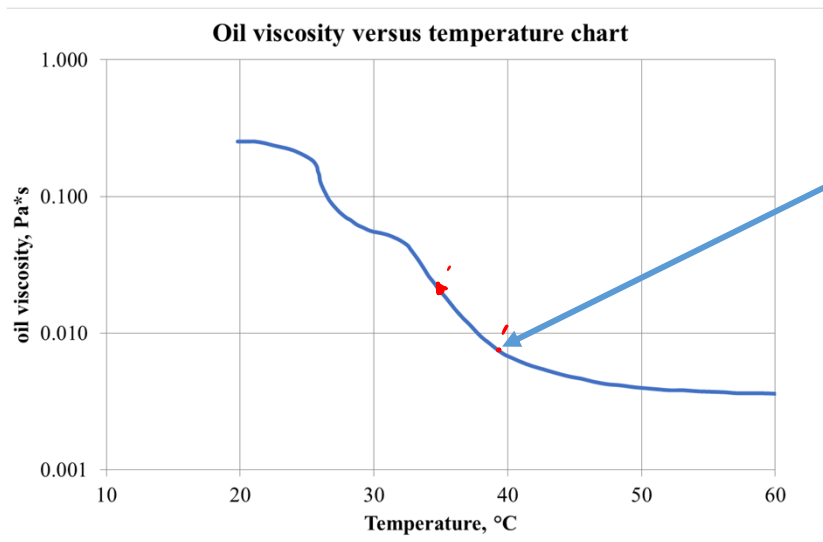

cloud point
WAT (wax appearance
temperature)

7

Wax

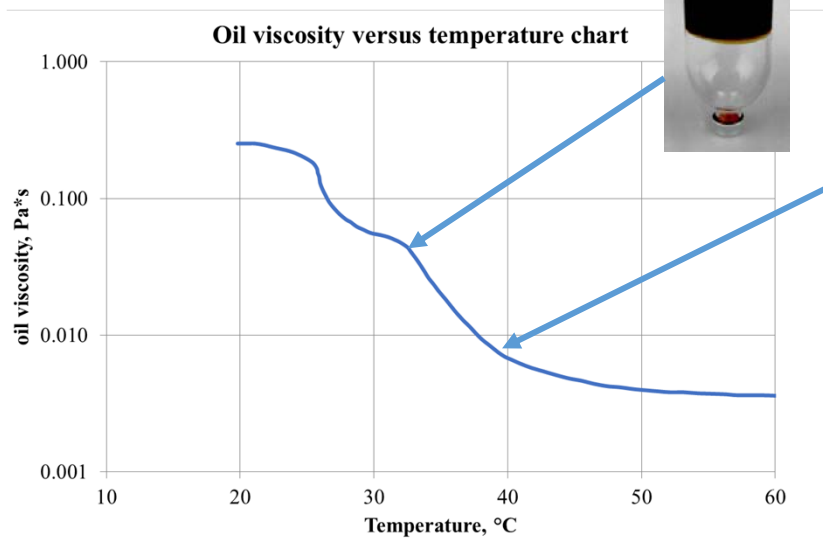


pour point



8



Wax

weight of wax particles $\times 100$
total weight

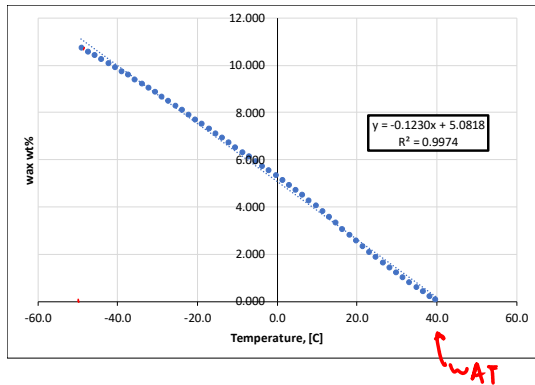

9


Wax

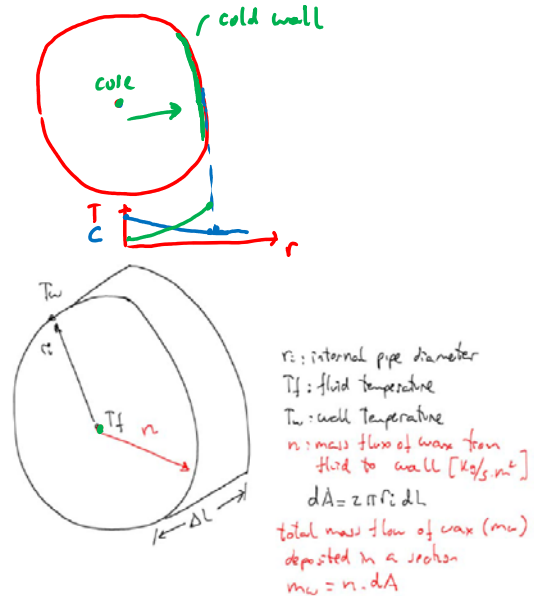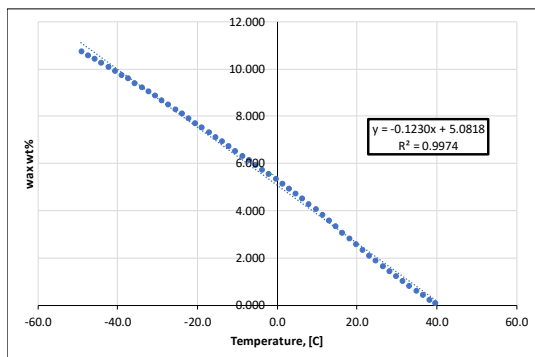

$$n = \rho_{wax} \cdot \frac{B}{\mu_o} \cdot \frac{dC}{dT} \cdot \frac{dT}{dr}$$

10

Wax


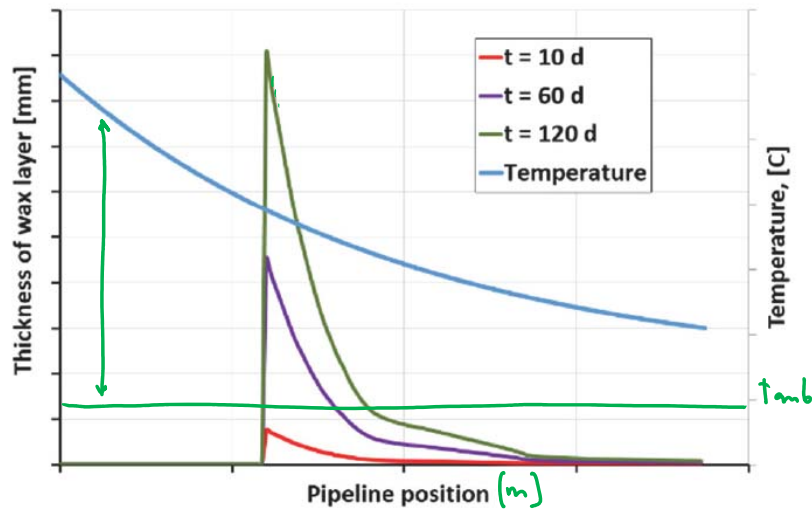


11

Asphaltenes



TAKEN FROM EQUINOR
(KALLEVIK)

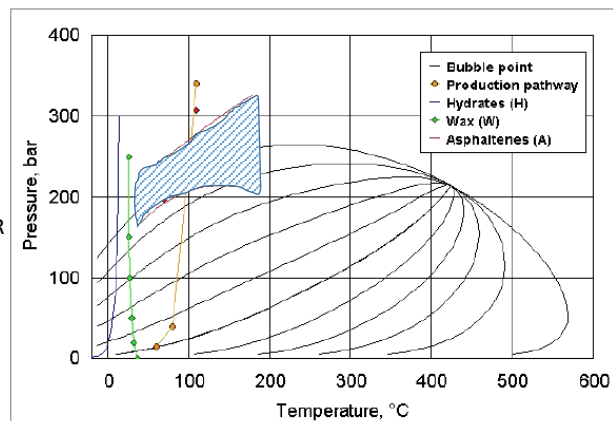

12



Scale



$BaSO_4$ $CaCO_3$ $NaCl$

Formasjonsvann		Seawater	
Ion	[mg/l]	Ion	[mg/l]
Na	14 800	Na	10 680
K	520	K	396
Mg	13	Mg	1 279
Ca	378	Ca	409
Ba	410	Ba	8
Sr	228	Sr	0
Fe	58	Fe	0
Cl	23 600	Cl	19 220
SO ₄	0	SO ₄	2 689

+





p↓
T↑



TAKEN FROM EQUINOR (SANDENGEN)


13

Erosion

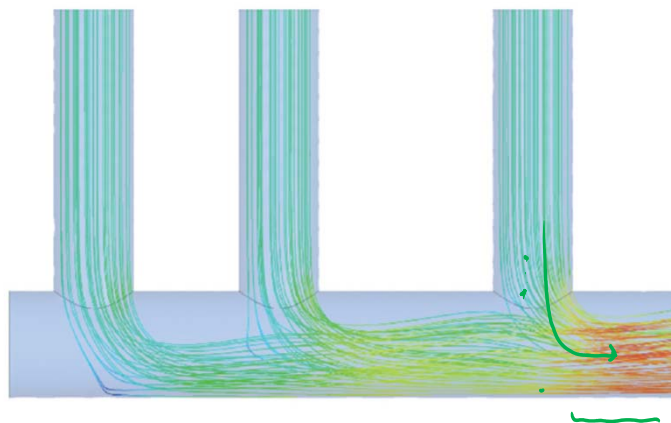


14

Slugging

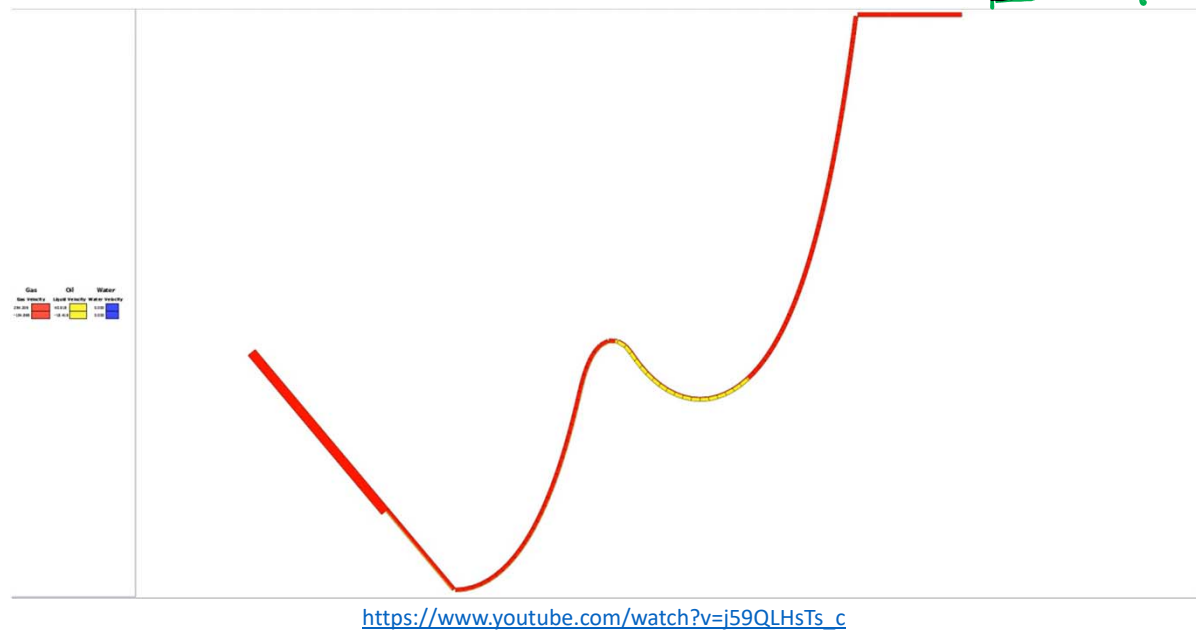


15

Slugging – impact on separator operation

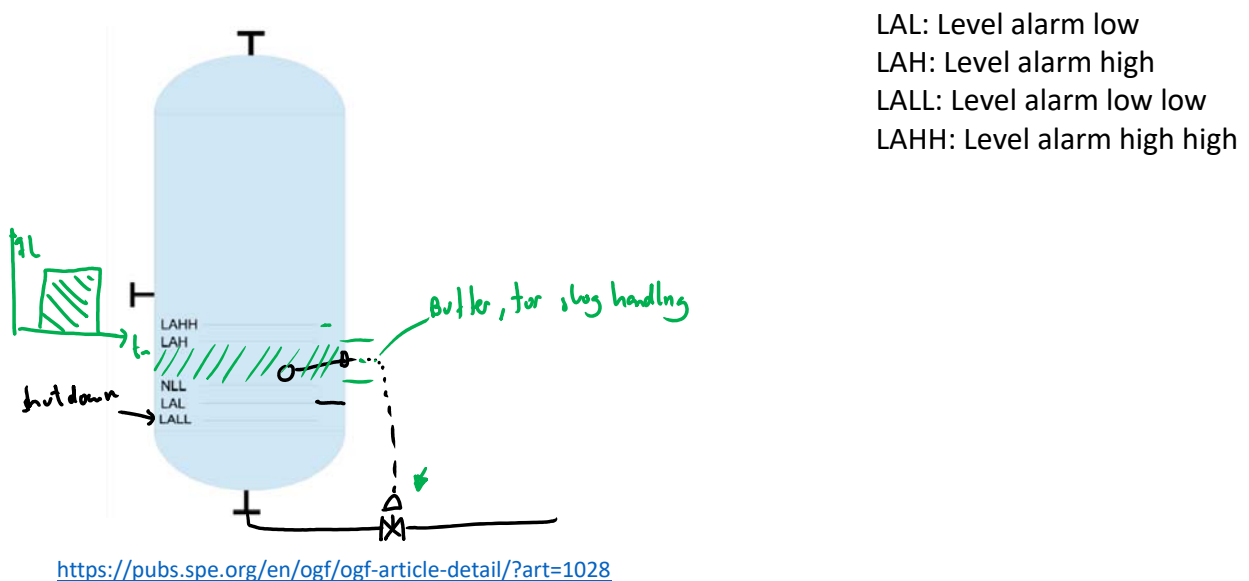


16

Slugging – impact on separator operation

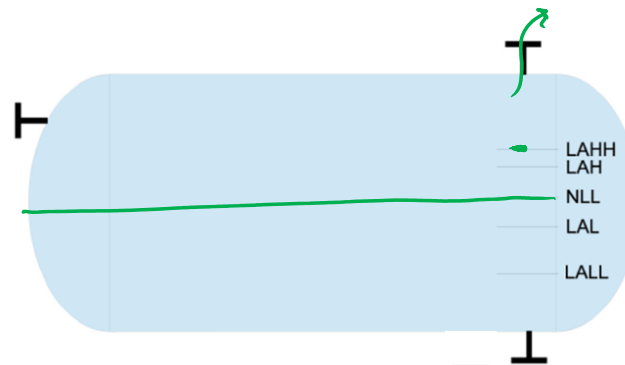

17



Slugging – slugcatcher handling slugs

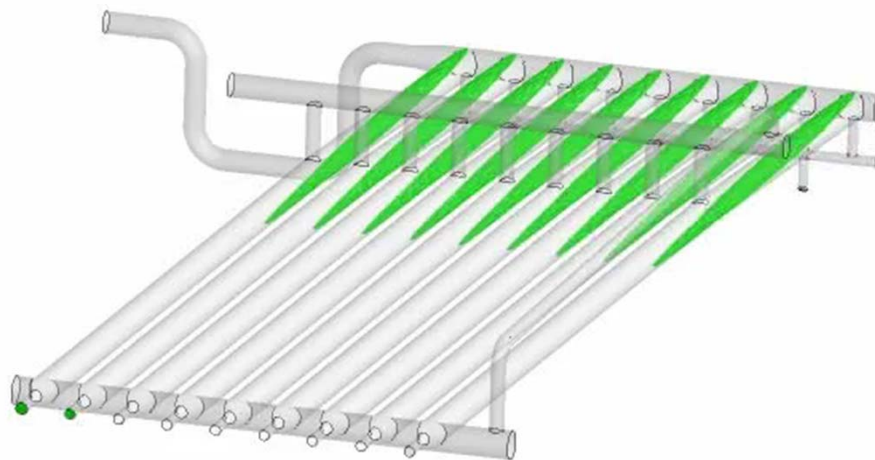

<https://www.youtube.com/watch?v=LKLW5284adI>

18

Corrosion

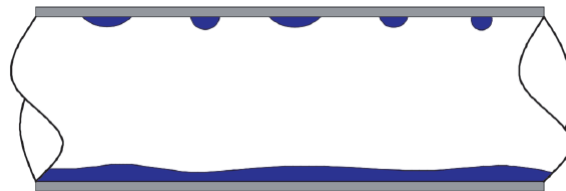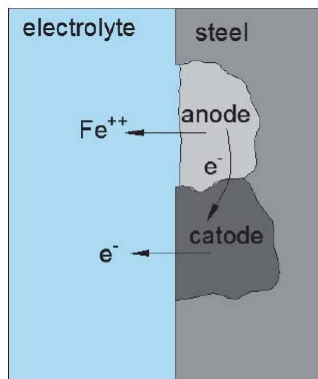

TOP of line corrosion


19

Oil-water emulsions




20

Oil-water emulsions

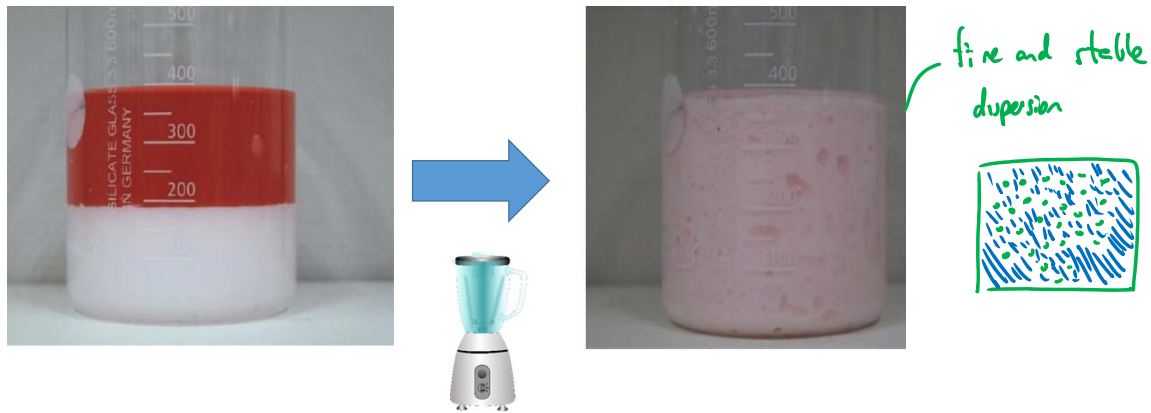


21

Oil-water emulsions

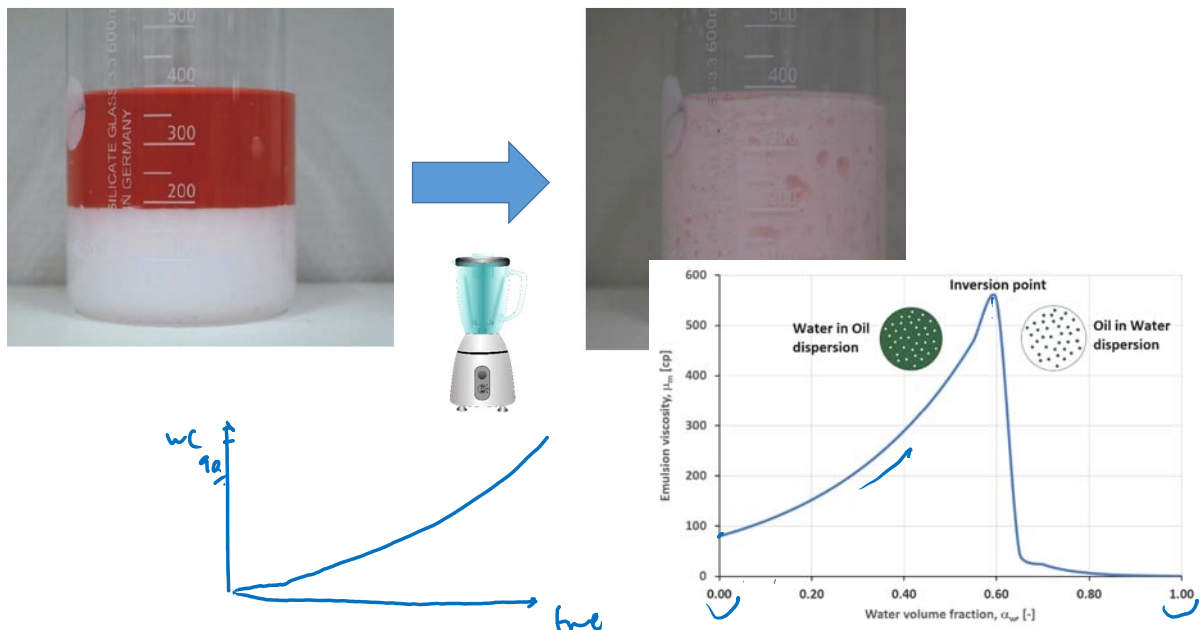


22

Foam

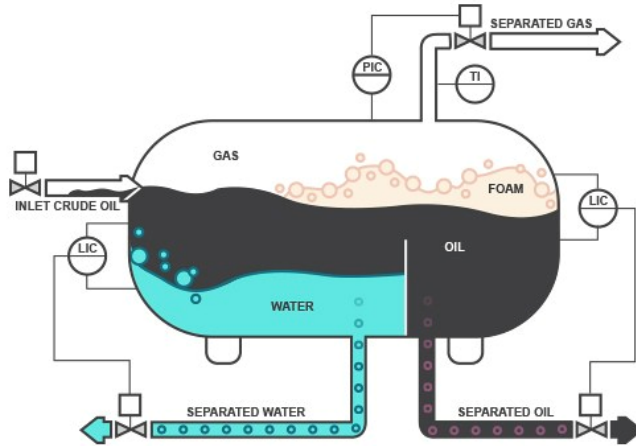

<https://www.arab-oil-naturalgas.com/foam-in-oil-gas-separators/>

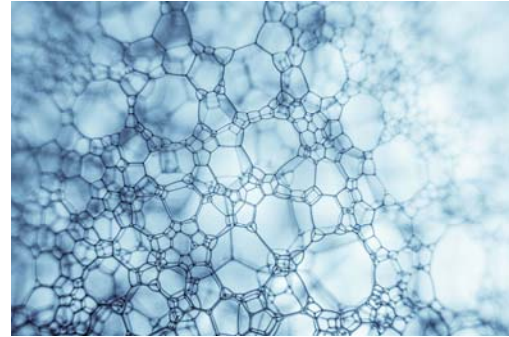

<https://www.crodaoilandgas.com/en-gb/discovery-zone/functions/foamers>

23

Flow assurance issue	Causes	Potential Consequences	Prevention/solution	Tools available for analysis
Hydrates	- Small gas HC molecules - Free water - Begin to form at a given p and T (low T, high P) given by thermodynamic equilibrium of the hydrate phase.	Blockage of flowlines and pipelines	Reduce the hydrate formation region: - Continuous or on-demand injection of chemical inhibitor (MEG or MEOH) Stay out of hydrate formation region: - Improve thermal insulation - Electric heating Others: - Cold flow* - Water removal and gas dehydration*	To determine Hydrate formation conditions: - Laboratory tests - Empirical correlations - Thermodynamic simulators (e.g. Hysys, PVTsim, Unisim) To determine p and T along the pipe: - Multiphase simulator (Olga, LedaFlow). - Computational fluid dynamics (CFD)
Wax	- Composition of the crude oil - Begins to form at given p and T due to changes in solubility - Cold wall	In wells, flowlines and pipelines: - Increase pressure drop (pipe roughness) - Reduction of cross section area - Pipe blockage - Changes fluid rheology - Gelling (problem for startup)	- Pigging - Thermal insulation - Electric heating - Chemical inhibitors - Chemical dissolvers - Pipe coating - Cold flow*	- Laboratory tests - Transient multiphase simulators (e.g. Olga, LedaFlow) - Computational fluid dynamics (CFD)
Slugging	- Dynamics of multiphase flow of liquid and gas - Reduction of rate - Liquid accumulation on low points	Fluctuating liquid and gas input to processing facilities In flowlines and pipelines: - Vibration - Added pressure drop - Fatigue	- Change separator size - Pipeline dimensioning - Maintain flow above minimum flow rate - Gas lift in riser base - Choking topside - Pipeline re-routing - Subsea separation*	- Transient multiphase simulator (OLGA, LEDA) - Structural analysis (usually with FEA, e.g. Ansys) - Laboratory experiments
Scaling	- Changes in solubility (e.g. changes in P and T conditions, changes in pH, mixture of incompatible water, CO2 injection).. - Irregularities on surface	In wells, pipelines and flowlines: - Reduction of cross section area - Pipe blockage - Malfunctioning of valves and equipment	- Continuous injection of chemical inhibitors - Dilution by adding more water - Chemical dissolvers - Mechanical removal - Coating	- Laboratory tests - Simulation tools

24

Flow assurance issue	Causes	Potential Consequences	Prevention/solution	Tools available for analysis
Erosion	- Sand production - High flow velocities - Liquid droplets in the gas - Gas droplets in the liquid	In wells, pipelines and flowlines: • Structural damage • Vibration • Leaks • Corrosion	• Change geometry • Replacement and maintenance of components • Reduce flow rate (reduce formation drawdown) • Sand separation* • Coatings	• Standards (DNV-RP-0501) • Computational fluid dynamics • Laboratory testing
Corrosion	- Water - O₂ - CO₂ - H₂S	• Leaks • Integrity	• Coatings • Material selection • Surface passivation	• Laboratory testing
Emulsions	- Emulsification agents in the crude - Mixing, shear when flowing through valves, chokes, etc	• Added pressure drop • Increased separation time	• Injection of demulsifiers • Heating	• Laboratory tests • Multiphase models
Asphaltenes	- Crude with asphaltenes - Pressure reduction - Addup of light hydrocarbon components	• Blockage of formation, well, flowline and pipeline • Loss of equipment functionality • Emulsification and foamification	• Mechanical removal • Chemical injection	• Laboratory tests • Some simulation tools

25

Measures and consequences

- **Chemical injection**
- System design, e.g.
 - pipe and component insulation
 - heat tracing
 - dead legs
 - pipeline routing
- Well intervention needs
- Water injection strategy
- Define procedures when shutting down and starting up
- Ensure proper distribution of chemicals



26

Example of chemical injection program

Tabell 5-2. Foreløpig oversikt over kjemikalietyper




Type kjemikalie	Konsentrasjon (ppm vol.)	Tilsettes i	Frekvens
Avleiringshemmer A	50	Produsert vann	Kontinuerlig
Avleiringshemmer B	20-50	Sjøvann	Kontinuerlig
Korrosjonshemmer	50	Produsert vann	Kontinuerlig
Emulsjonsbryter	50	Total væske 1)	Kontinuerlig ved behov
Skumdemper	5	Total væske	Periodisk
Flokkulant	10	Produsert vann	Kontinuerlig
Vokshemmer	150	Total væske 1)	Periodisk
Biocid	80	Total væske 1)	Kontinuerlig
Oksygenfjerner	5	Sjøvann	Kontinuerlig
H ₂ S fjerner	150	Produsert vann	Kontinuerlig ved behov
MEG	Batch	Brønnstrøm	Ved behov

1) Olje og produsert vann.

27

Release and disposal of chemicals

Tabell 7-1 Klassifisering av kjemikalier i henhold til OSPAR

	Svart kategori: Stoffer som er lite nedbrytbare og samtidig viser høyt potensial for bioakkumulering og/eller er svært akutt giftige. I utgangspunktet er det ikke lov å slippe ut kjemikalier i svart kategori. Tillatelse til bruk og utslipp til spesifikke kjemikalier gis dersom det er nødvendig av sikkerhetsmessige og tekniske grunner.
	Rød kategori: Stoffer som brytes sakte ned i det marine miljøet, og viser potensiale for bioakkumulering og/eller er akutt giftige. Kjemikalier i rød kategori kan være miljøfarlige og skal derfor prioriteres for utskifting med mindre miljøfarlige alternativer. Tillatelse til bruk og utslipp gis kun av sikkerhetsmessige og tekniske hensyn.
	Gul kategori: Kjemikalier i gul kategori omfatter stoffer som ut ifra iboende egenskaper ikke defineres i svart eller rød kategori og som ikke er oppført på PLONOR-listen (se under). Ren gul kategori er uorganiske kjemikalier med lav giftighet eller kjemikalier som brytes ned >60% innen 28 dager. Gul-Y1 er 20-60% nedbrutt og forventes å brytes ned fullstendig over tid. Gul-Y2 er moderat nedbrytbare til ikke giftige og ikke-nedbrytbare komponenter. Y2 skal forsøkes substituert på lik linje med røde kjemikalier.
	Grønn kategori: Stoffer som er oppført på OSPAR-konvensjonens PLONOR-liste (Substances used and discharged offshore which are considered to Pose Little Or No Risk to the Environment). Disse kjemikaliene vurderes å ha ingen eller svært liten negativ miljøeffekt. Kjemikalier i grønn kategori omfatter også vann som inngår i kjemikaliene.

From Ivar Aasen PDO,
Del 2

28

Release and disposal of chemicals


Tabell 7-4 Miljømessige egenskaper til produksjonskjemikalier som vil følge produsert vann fra Johan Castberg-feltet

Type kjemikal	Vannfase/oljefase	Klassifisering
Avleiringshemmer	Vannløselig. Følger produsert vann.	Det er antatt at gult kjemikalie (i klassen Y2) kan velges. Kjemikallet er moderat bionedbrytbart til ikke bionedbrytbart Det er ikke giftig og vil ikke bioakkumuleres i næringskjeden.
Emulsjonsbryter	Oljeløselig. Følger hovedsakelig oljefasen (95%). 5% følger produsert vann.	Alle disse kjemikaliene er klassifisert som røde, pga det ikke er bionedbrytbart. De er ikke giftige og vil ikke bioakkumulere i næringskjeden.
Vokshemmer	Oljeløselig. Følger oljefasen.	
Skumdemper	Oljeløselig. Følger i all hovedsak oljefasen, lave konsentrasjoner i produsert vann.	
Flokkulant	Vannløselig, men binder seg til oljedråper. Følger hovedsakelig oljefasen (80%). 20% er antatt å følge produsert vann.	
Biocid/Glutaraldehyd	Vannløselig. Følger injeksjonsvannet eller produsert vann.	Kjemikalie er klassifisert som gult pga giftighet. Det er ikke nedbrytbart og vil ikke bioakkumuleres i næringskjeden.

From Johan Castberg
PDO, Del 2

29


More about production chemicals

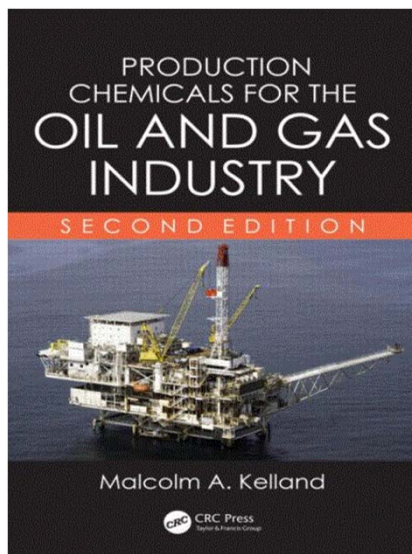

30

Flow assurance evaluation during field planning


- Detect potential showstoppers and communicate technical constraints and repercussions to field planner
- Laboratory tests

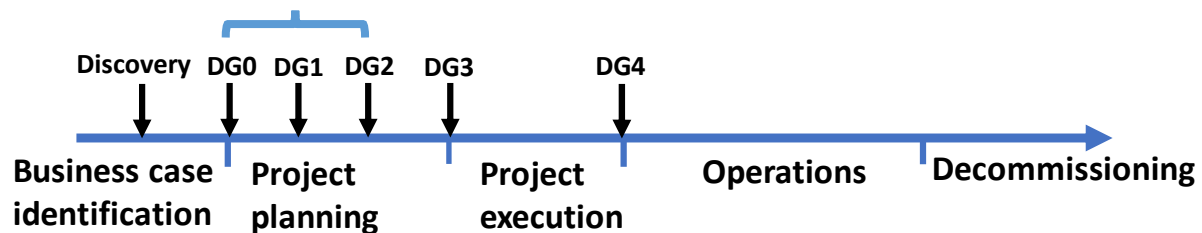

31


Flow assurance evaluation during field planning

- Refine the flow assurance strategy
- More laboratory tests
 - Management plan
 - prediction of p and T
 - Study of startup and shutdown
 - System design and verification
 - FIV

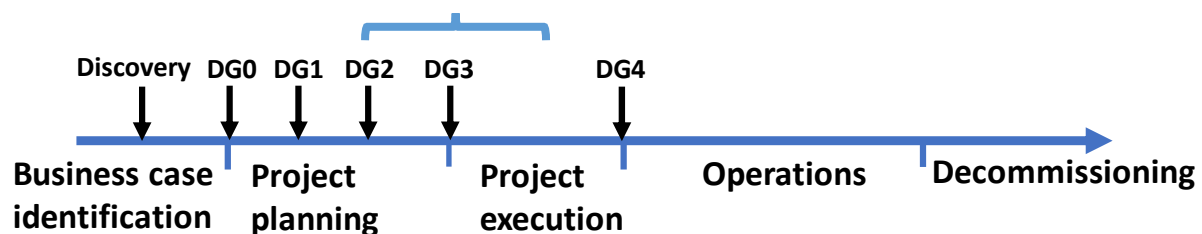


32

Injection of production chemicals subsea

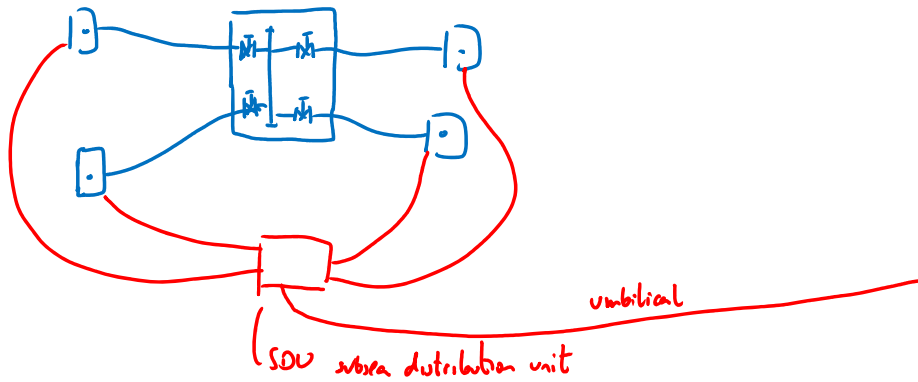


33

Injection of production chemicals

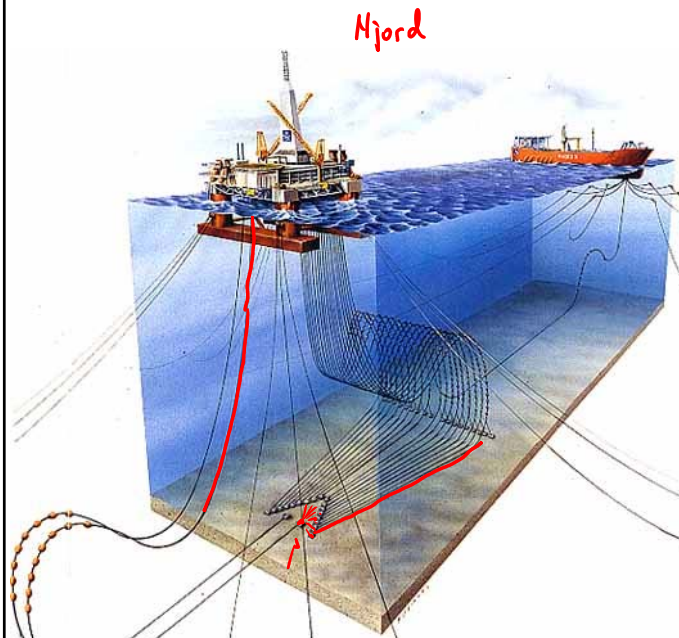


34

Umbilicals, injection of production chemicals

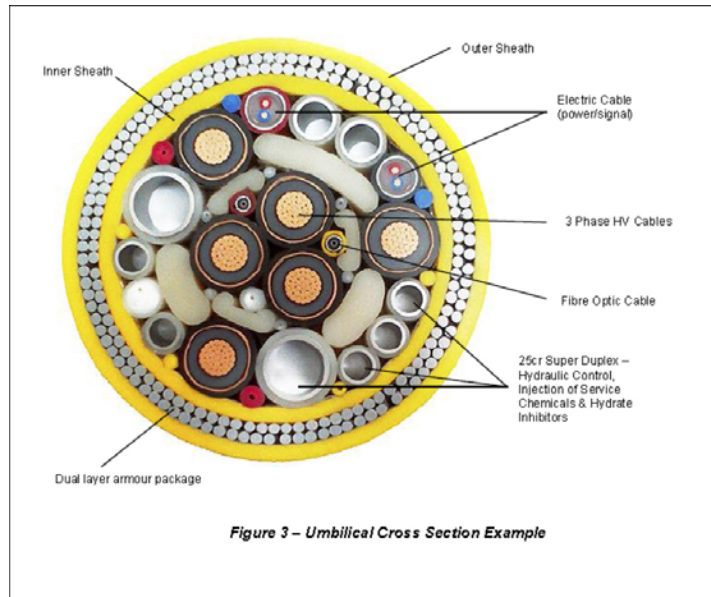


35

Umbilicals, injection of production chemicals

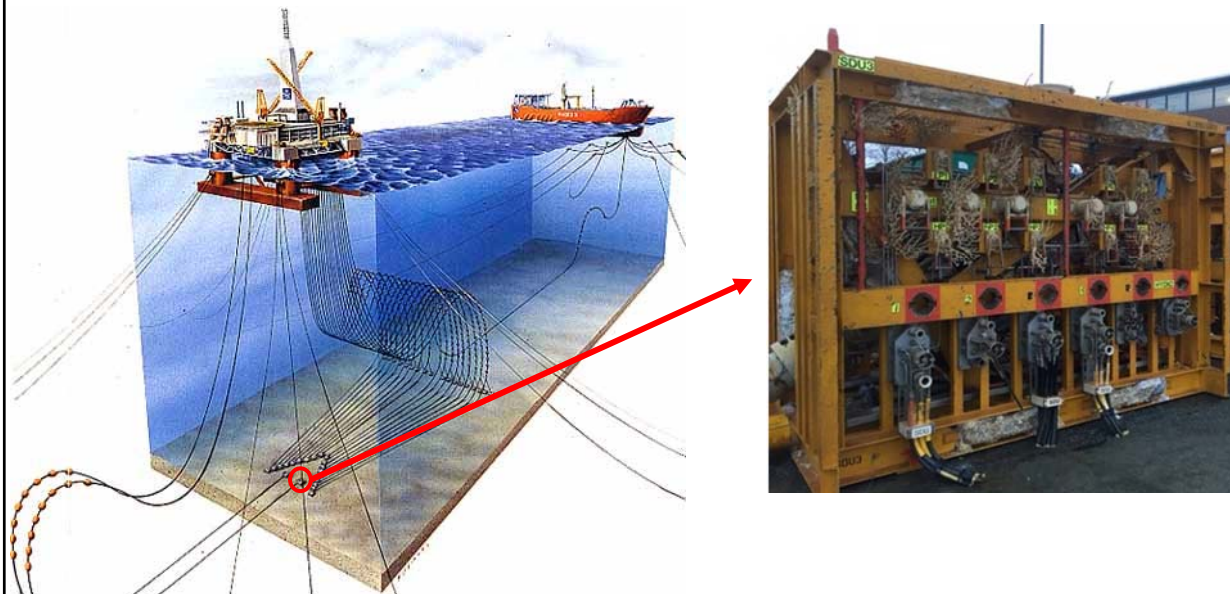


36

Release and disposal of chemicals

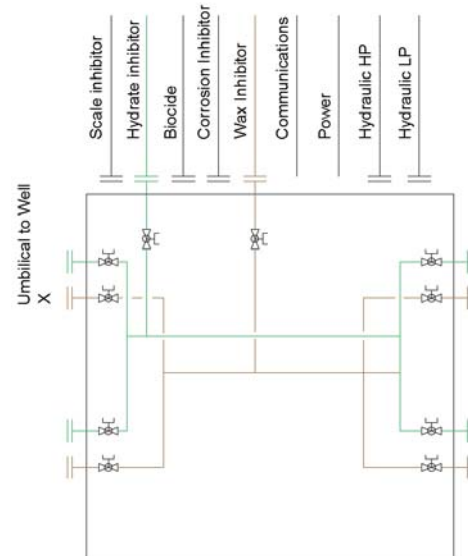


37

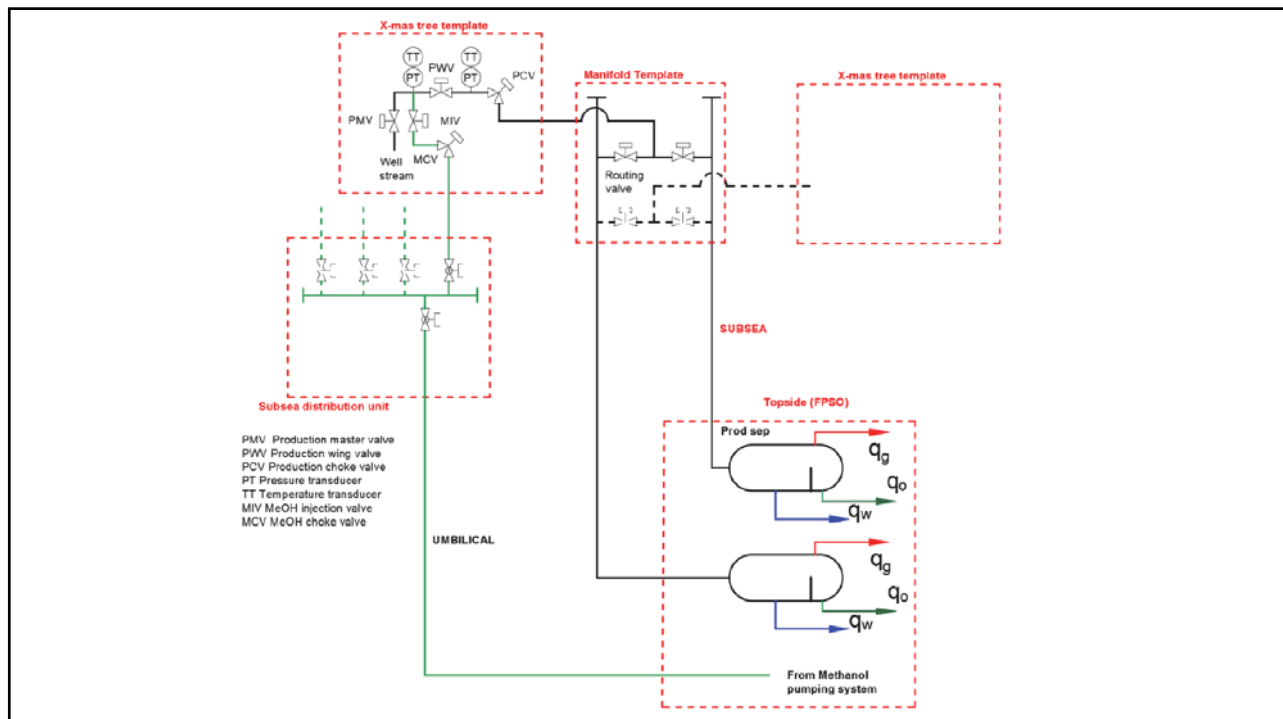


38

Injection of production chemicals – template wells

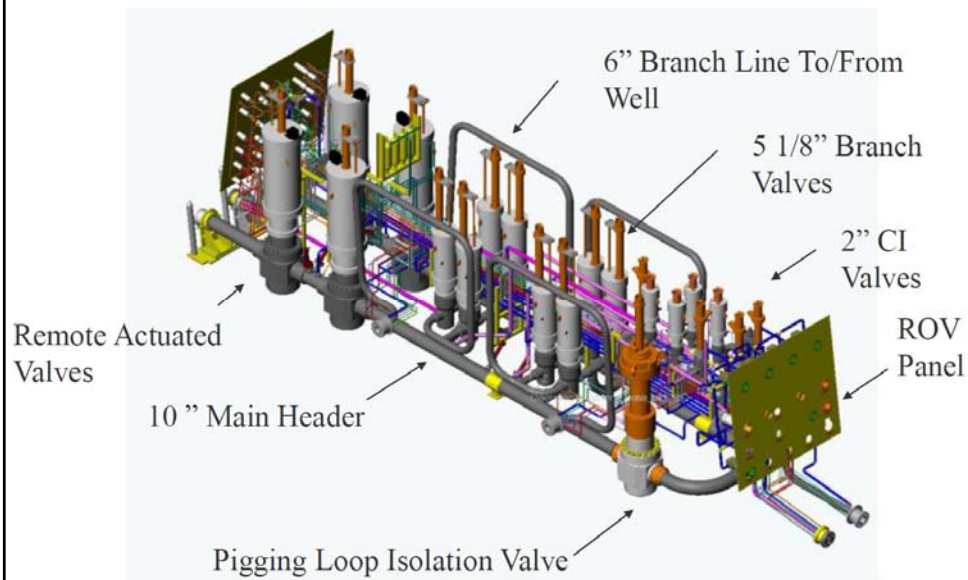


39

Injection of production chemicals – template wells

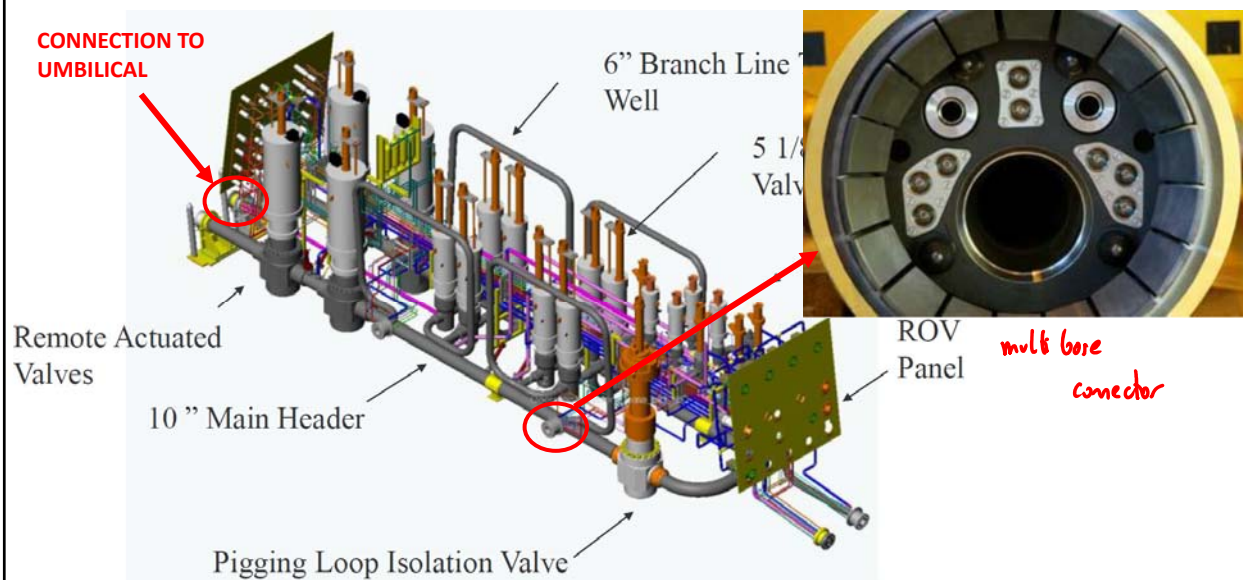


40

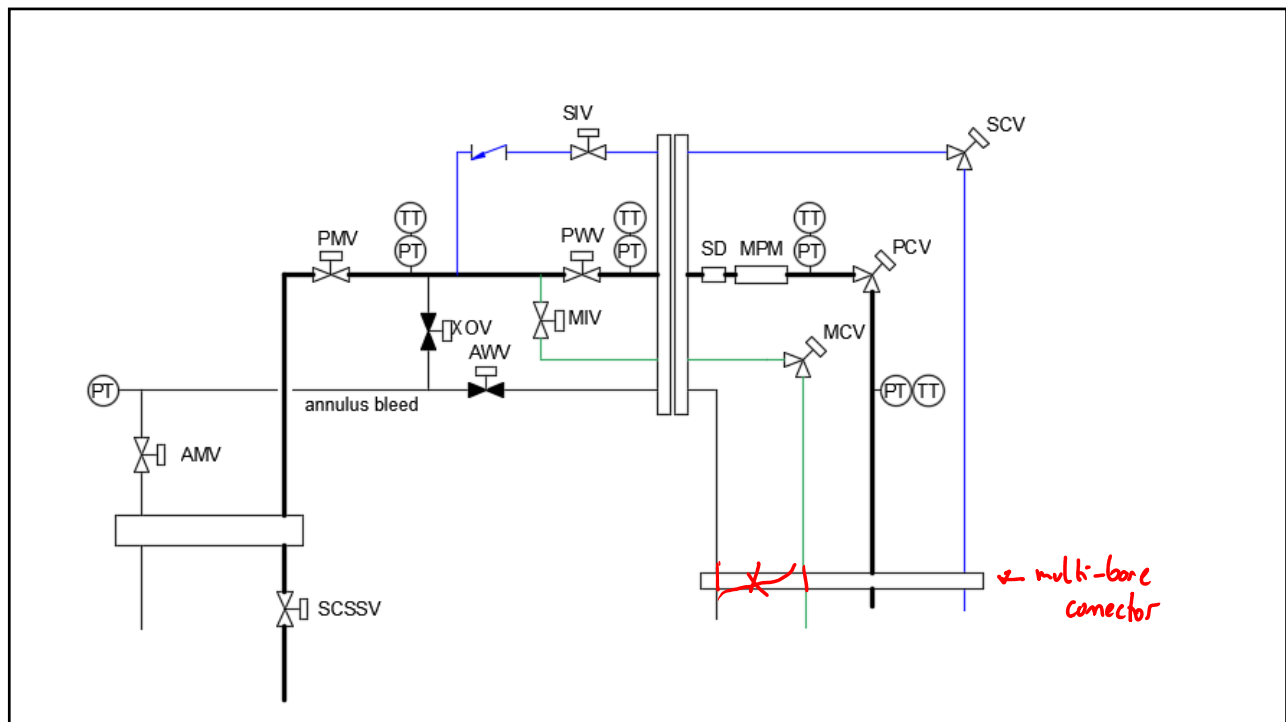

41


Injection of production chemicals in well

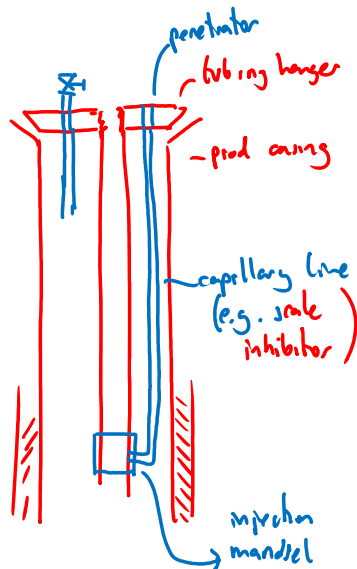


42

Subsea manifold and dead-leg geometry


- Dead-legs are inherently present

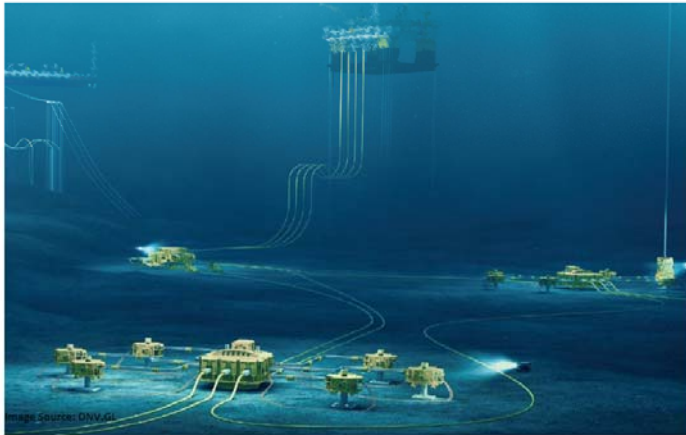

UTC Bergen - 16th June 2016

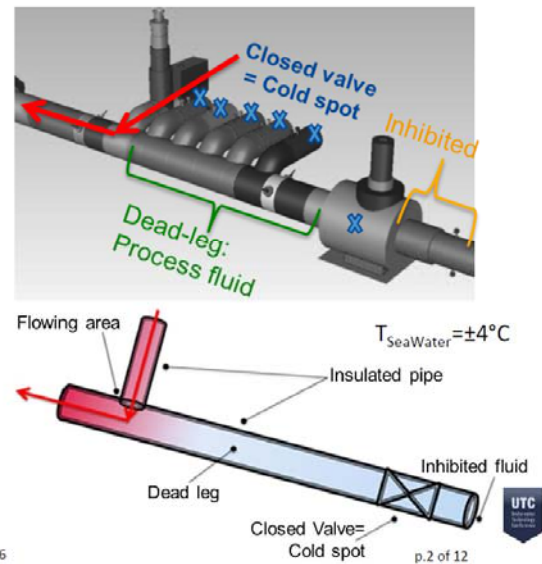

43

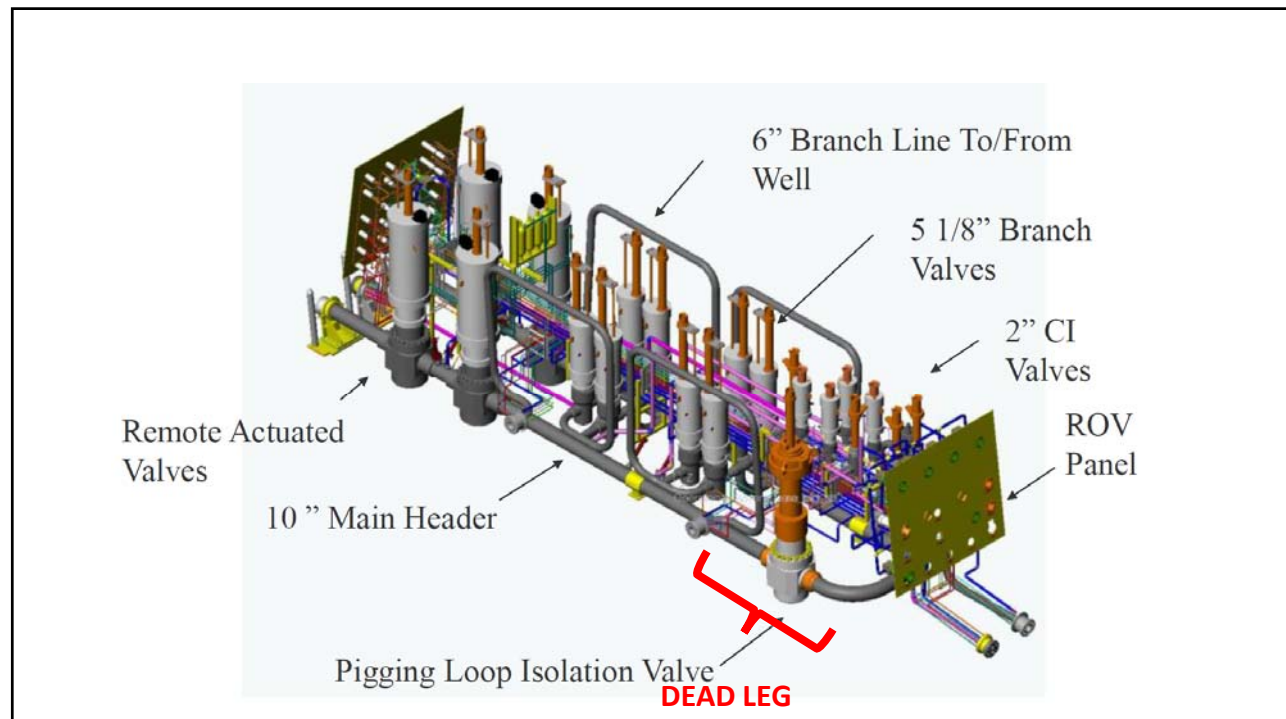

44

Tools for analysis

- Laboratory tests of fluids (oil, gas, water)
- Steady state flow simulators (Hysys, Gap, Pipesim, Olga, Leda, FlowManager)
- Transient flow simulators (Olga, LedaFlow, FlowManager, Hysys)
- Thermodynamic or PVT simulators (PVTsim, Hysys)
- Standards (DNV, API)
- CFD simulation for 3D flow analysis of pressure and temperature (Comsol, Ansys)
- Finite element analysis for structural analysis and heat transfer in solids (Abacus, Ansys)